



PFMF890DLT-8
8-LINE DATA SCIF/FACILITY FILTER
(TELEPHONE / VOICE)
DC-15KHZ PASSBAND
600/300 OHMS (L-L/L-G)

SPECIFICATIONS

MAX VOLTAGE: 0-250VAC/0-250VDC

OPERATING FREQUENCY: DC-60HZ

RATED CURRENT: 1A/LINE

AMBIENT TEMP.: -40 TO 65C

HIPOT (L-G): 1000VDC

TERMINALS: M5


PERFORMANCE: 100dB (120KHZ TO 20GHZ)

TYP. WEIGHT, LBS (KG): 15 (6.8)

ADDITIONAL DETAILS:

1. FOR INDOOR CONTROLLED ENVIRONMENTS
2. ALL EMI SEAMS 100% WELDED
3. FOR DIFFERENT CONDUIT CUTOUT OR HOLE LOCATION, CONSULT FACTORY

SPECIFICATIONS SUBJECT TO CHANGE

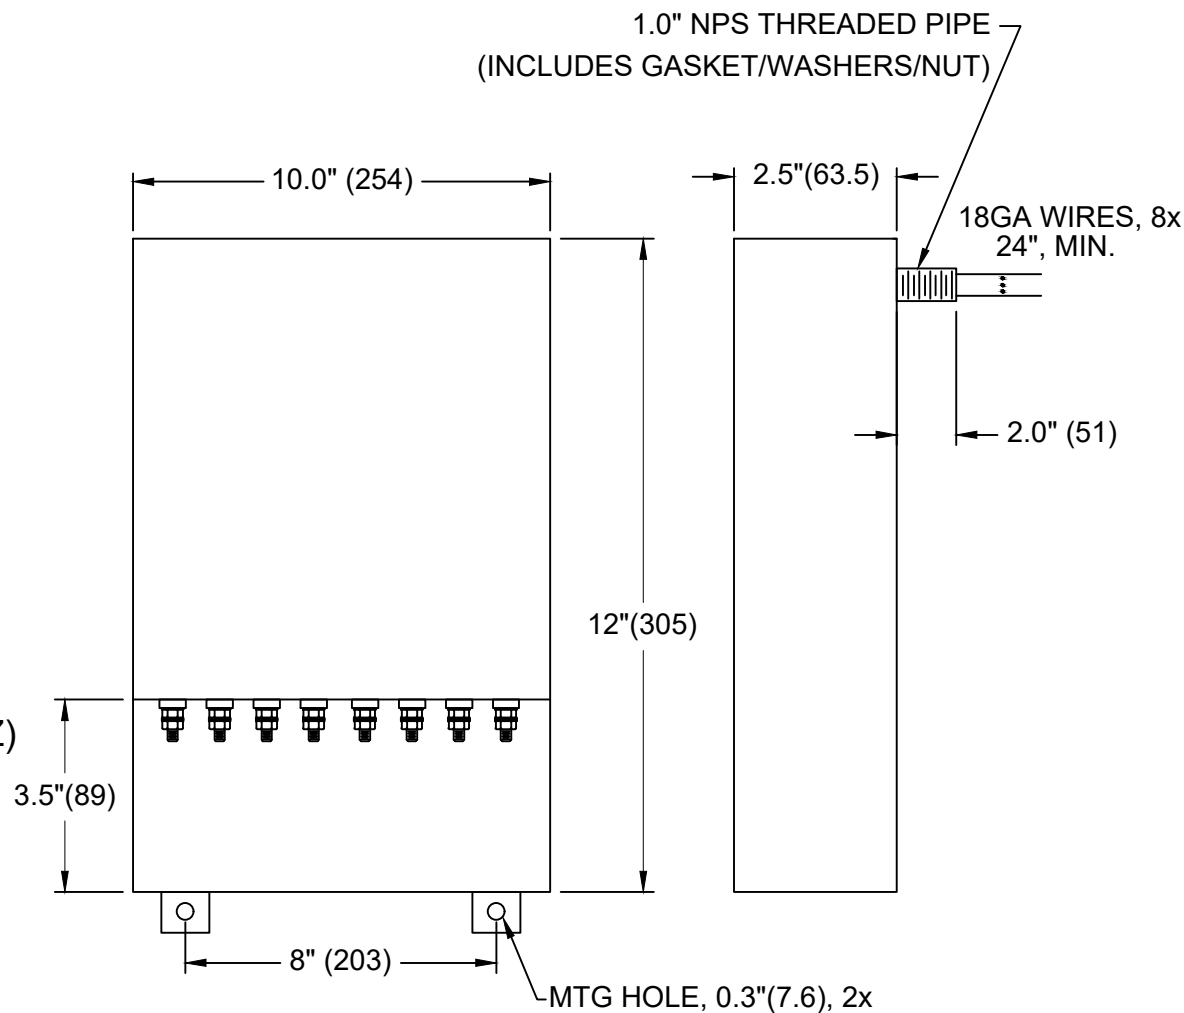

(COVER REMOVED FOR CLARITY)

