


PFMT232S-60
3-LINE TEMPEST FILTER
100dB@14KHZ

SPECIFICATIONS

MAX VOLTAGE: 0-277/0-480VAC
 MAX CURRENT: 60A/LINE
 FREQUENCY: 50/60HZ
 OPERATING TEMP.: -40 TO 70C
 HIPOT (L-G): 1500VDC
 (PRIOR TO ADDING DISCHARGE RESISTORS)
 DISCHARGE VOLT. (@277V): <30V IN 30S
 PERFORMANCE: >100dB (14KHZ TO 20GHZ)
 DESIGNED IN ACCORDANCE WITH THE
 FOLLOWING STANDARDS:
 UL1283
 MIL-STD-220
 MIL-F-15733
 LV DIRECTIVE

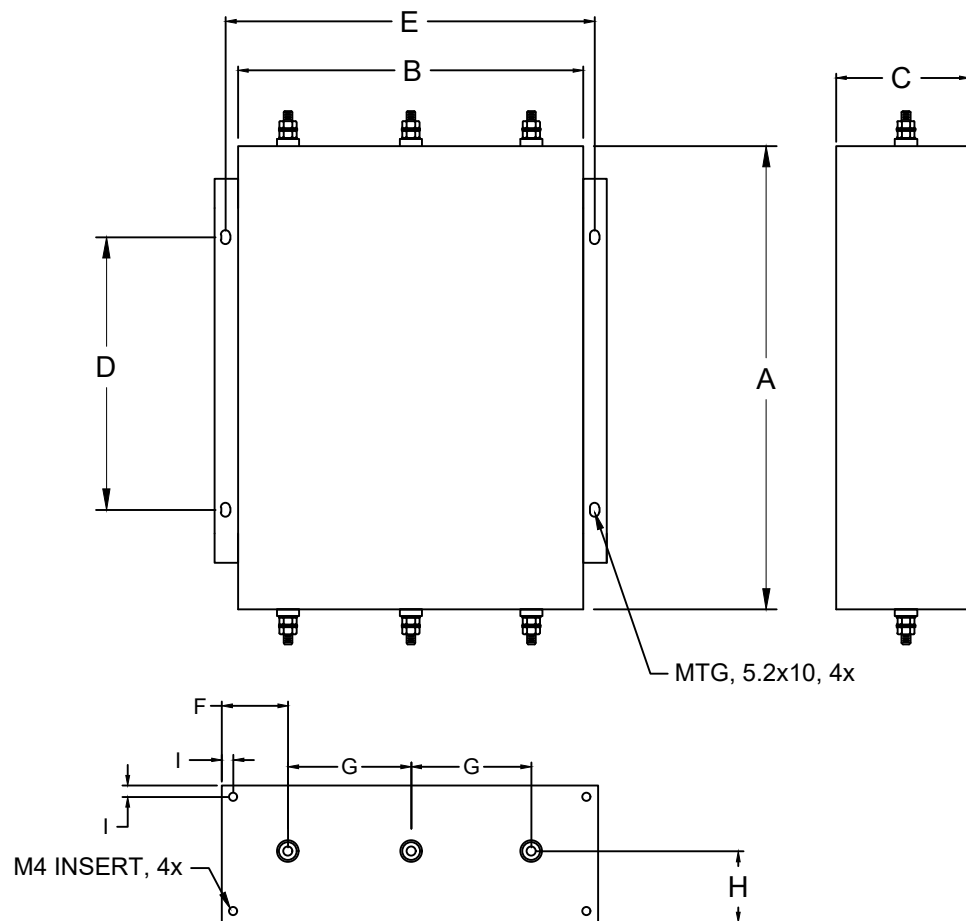

MODEL	AMPS	TERMINALS	DIMENSIONS - MM (IN)								WEIGHT LBS(KG)	
			A	B	C	D	E	F	G	H		I
PFMT232S-60	60	M5	203	102	102	152	127	25.4	25.4	51	12.7	16(7.3)
			(8)	(4)	(4)	(6)	(5)	(1)	(1)	(2)	(0.5)	