

PFMT444S-300
4-LINE + GND TEMPEST FILTER
100dB@10KHZ

SPECIFICATIONS


MAX VOLTAGE: 0-277/0-480VAC
 MAX CURRENT: 300A/LINE
 FREQUENCY: 50/60HZ
 OPERATING TEMP.: -40 TO 70C
 HIPOT (L-G): 2200VDC
 (PRIOR TO ADDING DISCHARGE RESISTORS)
 DISCHARGE VOLT. (@277V): <30V IN 30S
 OVERLOAD: 140% RATED CURRENT FOR 15 MINUTES
 PERFORMANCE: >100dB (10KHZ TO 20GHZ)
 DESIGNED IN ACCORDANCE WITH THE
 FOLLOWING STANDARDS:

MIL-STD-220
 MIL-F-15733
 MIL-STD-810
 LV DIRECTIVE



5025116

CONFORMS TO
 UL STD 1283

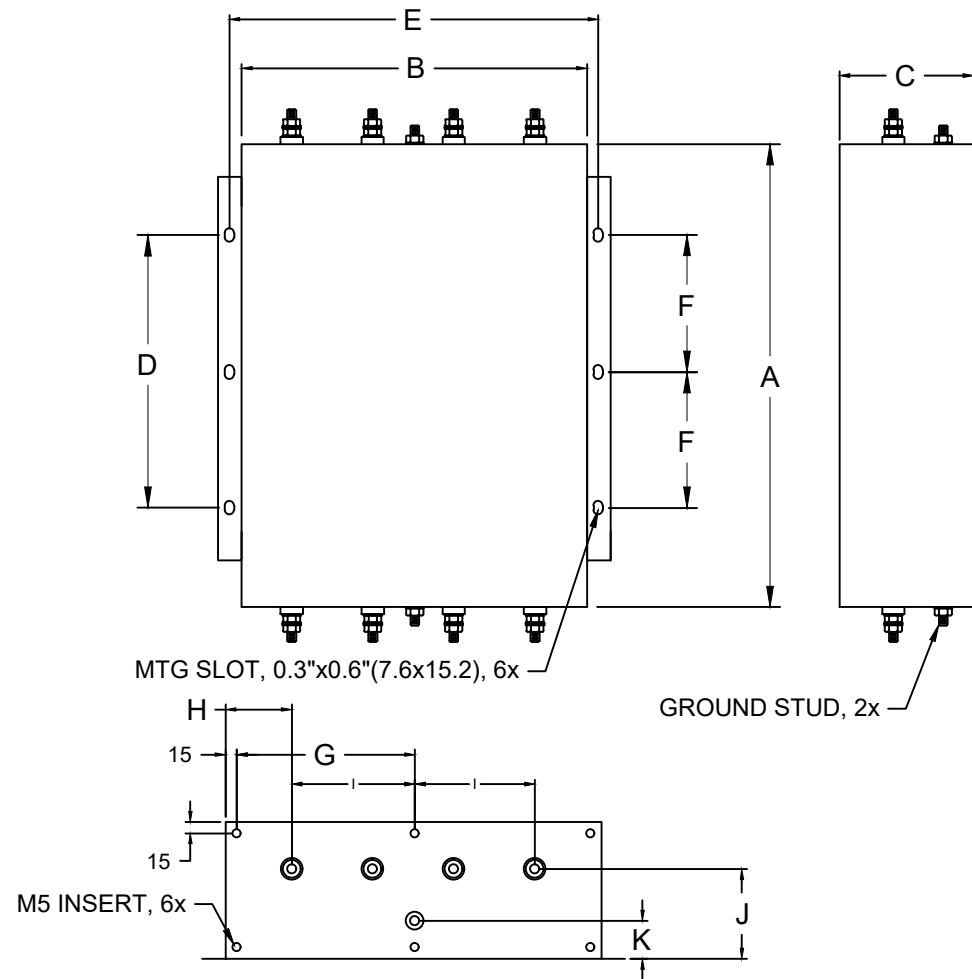

MODEL	AMPS	TERMINALS	DIMENSIONS - MM (IN)											WEIGHT LBS(KG)
			A	B	C	D	E	F	G	H	I	J	K	
PFMT444S-300	300	M16	762	406	203	662	431	331	188	65	138	120	54	220(100)
			(30)	(16)	(8)	(26)	(17)	(13)	(7.4)	(2.56)	(5.4)	(4.7)	(2)	