



PFMF302S-32
2-LINE + GND SCIF/FACILITY FILTER

SPECIFICATIONS

MAX VOLTAGE: 0-277/0-480VAC

MAX CURRENT: 32A/LINE

FREQUENCY: 50/60HZ

OPERATING TEMP.: -40 TO 65C

HIPOT (L-G): 2200VDC

(PRIOR TO INSTALLING DISCHARGE RESISTORS)

DISCHARGE VOLT. (@277V): <30V IN 30S

VOLT. DROP: <2% MAX AT FULL RATED UNITY LOAD

OVERLOAD: 140% RATED CURRENT FOR 15 MINUTES

PERFORMANCE: 100dB (14KHZ TO 40GHZ)

MANUFACTURED IN ACCORDANCE WITH

THE FOLLOWING STANDARDS:

MIL-STD-220


MIL-F-15733

MIL-STD-810

LV DIRECTIVE



CONFORMS TO
 UL STD 1283

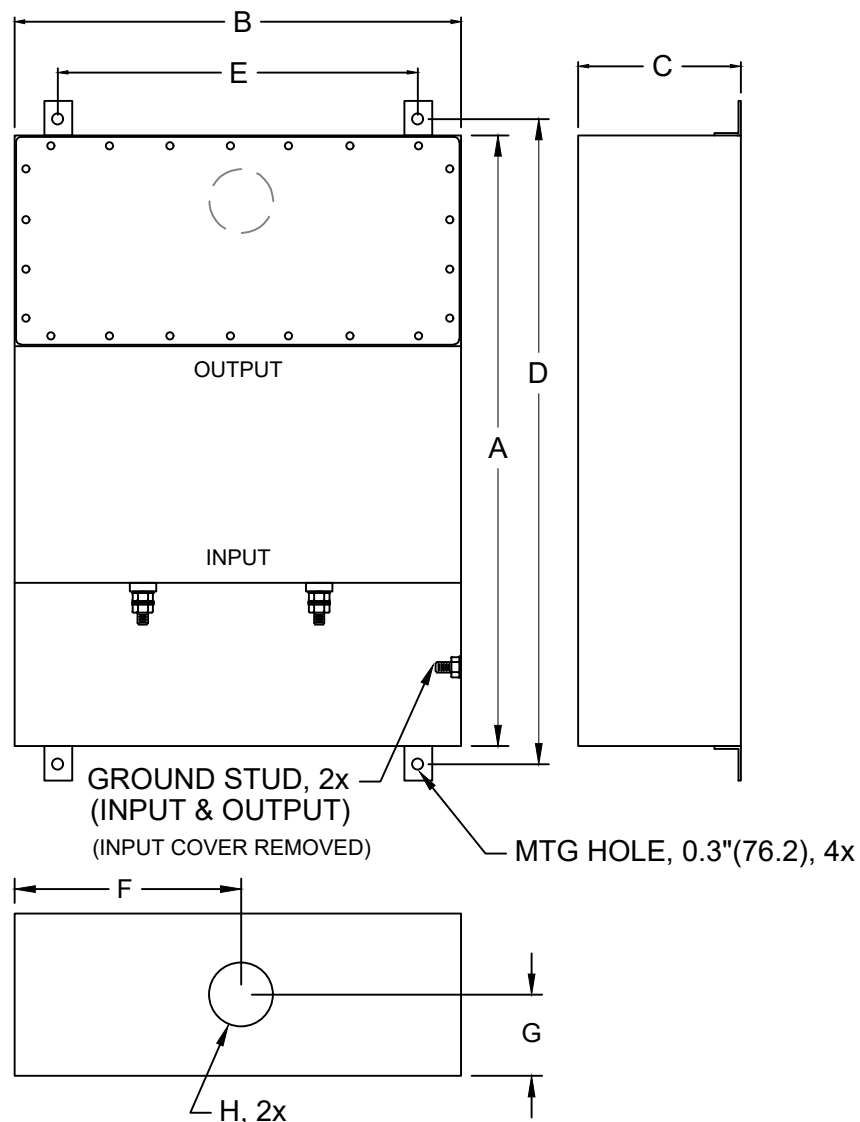

| MODEL | AMPS | TERMINAL | DIMENSIONS, MM(IN) | | | | | | | | WEIGHT LB(KG) |
|-------------|------|----------|--------------------|------|-----|--------|-----|-----|-------|--------|---------------|
| | | | A | B | C | D | E | F | G | H | |
| PFMF302S-32 | 32 | M6 | 610 | 254 | 127 | 648 | 204 | 127 | 63.5 | 35 | 38 (17.3) |
| | | | (24) | (10) | (5) | (25.5) | (8) | (5) | (2.5) | (1.38) | |