




PFMF302S-63
2-LINE + GND SCIF/FACILITY FILTER

SPECIFICATIONS

MAX VOLTAGE: 0-277/0-480VAC
MAX CURRENT: 63A/LINE
FREQUENCY: 50/60HZ
OPERATING TEMP.: -40 TO 65C
HIPOT (L-G): 2200VDC
(PRIOR TO INSTALLING DISCHARGE RESISTORS)
DISCHARGE VOLT. (@277V): <30V IN 30S
VOLT. DROP: <2% MAX AT FULL RATED UNITY LOAD
PERFORMANCE: 100dB (14KHZ TO 40GHZ)
MANUFACTURED IN ACCORDANCE WITH
THE FOLLOWING STANDARDS:

MIL-STD-220
MIL-F-15733
LV DIRECTIVE

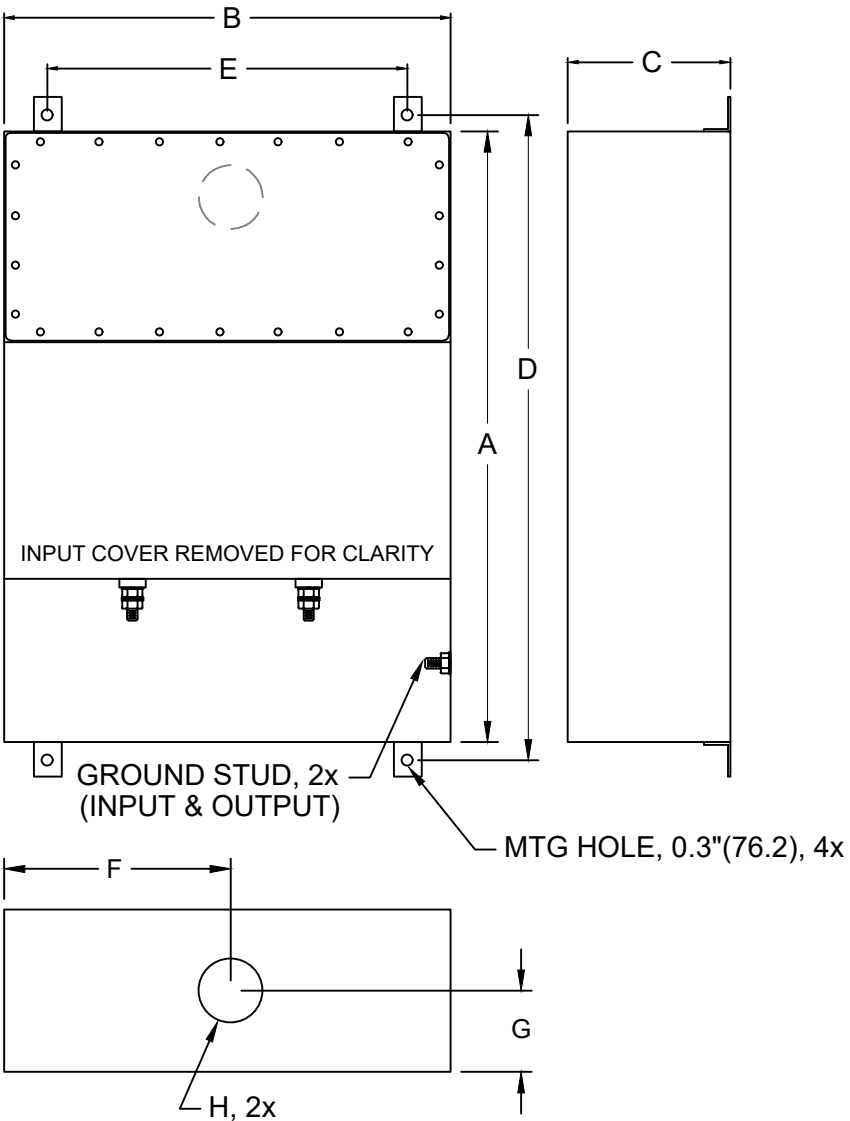

(FOR DIFFERENT CUTOUT SIZES OR LOCATIONS, CONSULT FACTORY)

MODEL	AMPS	TERMINAL	DIMENSIONS, MM(IN)								WEIGHT LB(KG)
			A	B	C	D	E	F	G	H	
PFMF302S-63	63	M10	762	305	165	800	255	153	83	50	65 (29.5)
			(30)	(12)	(6.5)	(31.5)	(10)	(6)	(3.27)	(2)	