

PFMF370-200-3

3-LINE + GND SCIF/FACILITY FILTER

SPECIFICATIONS

MAX VOLTAGE: 0-277/0-480VAC

MAX CURRENT: 200A/LINE

FREQUENCY: 50/60HZ

OPERATING TEMP.: -40 TO 65C

HIPOT (L-G): 2200VDC

(PRIOR TO INSTALLING DISCHARGE RESISTORS)

DISCHARGE VOLT. (@277V): <30V IN 30S

VOLT. DROP: <2% MAX AT FULL RATED UNITY LOAD

PERFORMANCE: 100dB (14KHZ TO 40GHZ)

MANUFACTURED IN ACCORDANCE WITH
THE FOLLOWING STANDARDS:

MIL-STD-220


MIL-F-15733

LV DIRECTIVE



CONFORMS TO
UL STD 1283

5025116

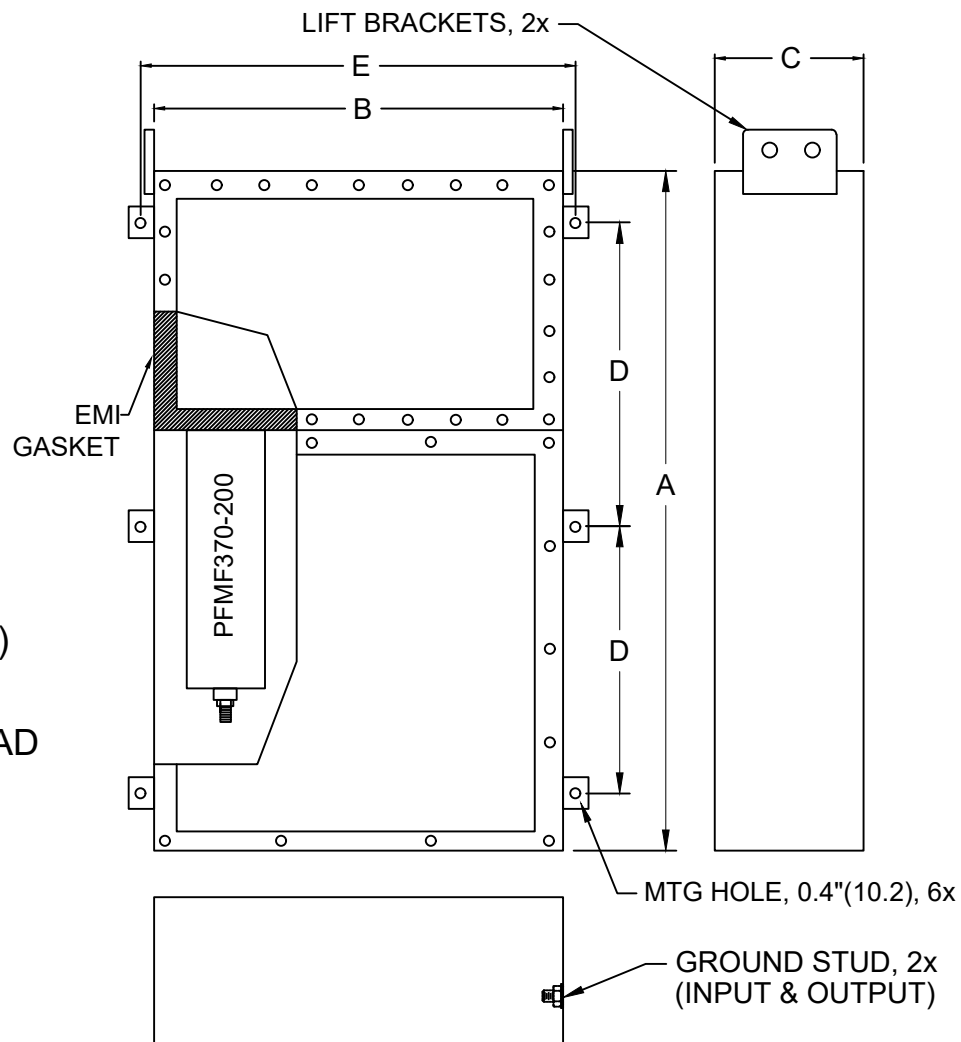

INPUT AND OUTPUT CONDUIT/WIRE PENETRATIONS BY END USER.
PREMIER CAN ADD CUTOUTS SPECIFIED AT TIME OF ORDERING.

MODEL	AMPS	TERMINAL	DIMENSIONS, MM(IN)					WEIGHT LBS(KG)	MOUNTING LEGS
			A	B	C	D	E		(OPTIONAL)
PFMF370-200-3	200	M12	1219	685	254	559	735	460 (209)	370250ML
			(48)	(27)	(10)	(22)	(29)		