



PFMF370-32-3

3-LINE + GND SCIF/FACILITY FILTER

### SPECIFICATIONS

MAX VOLTAGE: 0-277/0-480VAC

MAX CURRENT: 32A/LINE

FREQUENCY: 50/60HZ

OPERATING TEMP.: -40 TO 65C

HIPOT (L-G): 2200VDC

(PRIOR TO INSTALLING DISCHARGE RESISTORS)

DISCHARGE VOLT. (@277V): <30V in 30S

VOLT. DROP: <2% MAX AT FULL RATED UNITY LOAD

OVERLOAD: 140% RATED CURRENT FOR 15 MINUTES

PERFORMANCE: 100dB (14KHZ TO 40GHZ)

MANUFACTURED IN ACCORDANCE WITH

THE FOLLOWING STANDARDS:

MIL-STD-220

MIL-F-15733


MIL-STD-810

LV DIRECTIVE



CONFORMS TO  
UL STD 1283

INPUT AND OUTPUT CONDUIT/WIRE PENETRATIONS BY END USER.

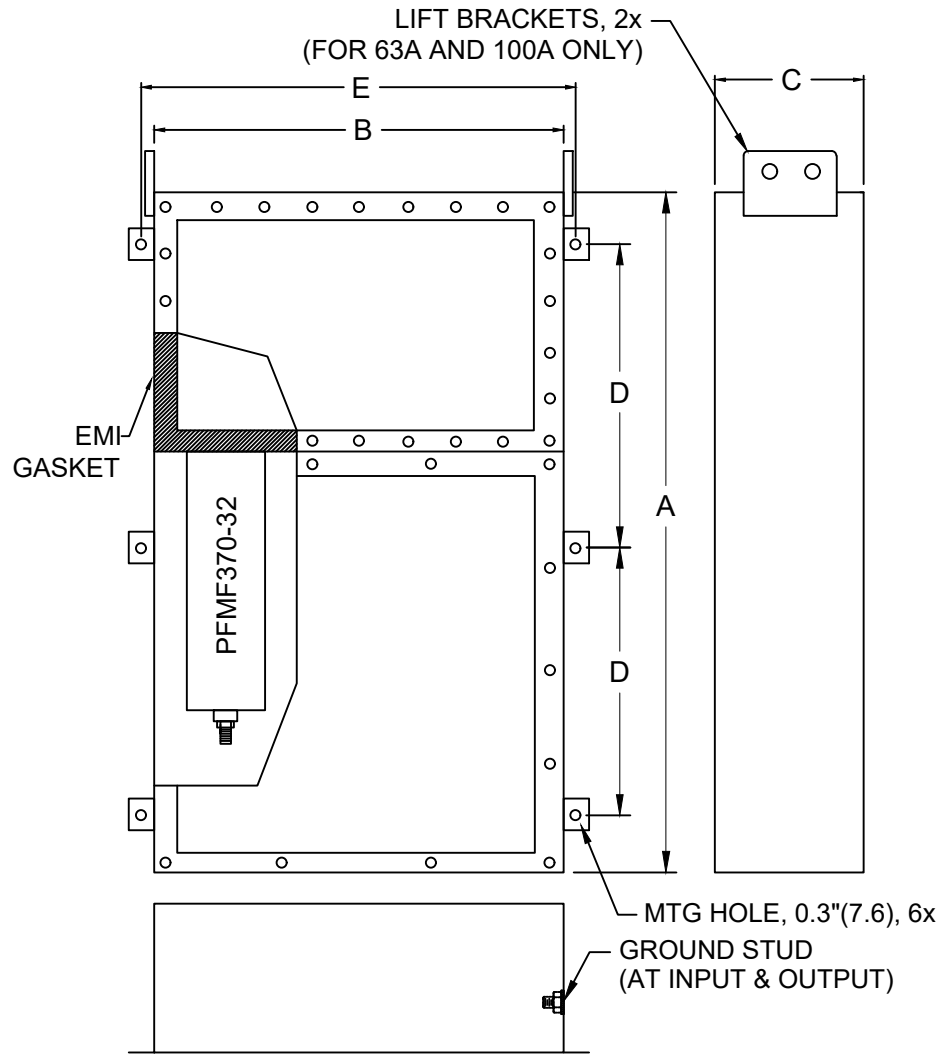

MODEL	AMPS	TERMINAL	DIMENSIONS - MM (IN)					WEIGHT LBS(KG)
			A	B	C	D	E	
PFMF370-32-3	32	M6	813	420	132	356	458	95 (43.2)
			(32)	(16.5)	(5.2)	(14)	(18)	