



PFMF370-63-4

4-LINE + GND SCIF/FACILITY FILTER

### SPECIFICATIONS

MAX VOLTAGE: 0-277/0-480VAC

MAX CURRENT: 63A/LINE

FREQUENCY: 50/60HZ

OPERATING TEMP.: -40 TO 65C

HIPOT (L-G): 2200VDC

(PRIOR TO INSTALLING DISCHARGE RESISTORS)

DISCHARGE VOLT. (@277V): <30V in 30S

VOLT. DROP: <2% MAX AT FULL RATED UNITY LOAD

OVERLOAD: 140% RATED CURRENT FOR 15 MINUTES

PERFORMANCE: 100dB (14KHZ TO 40GHZ)

MANUFACTURED IN ACCORDANCE WITH  
THE FOLLOWING STANDARDS:

MIL-STD-220


MIL-F-15733

MIL-STD-810

LV DIRECTIVE



CONFORMS TO  
UL STD 1283

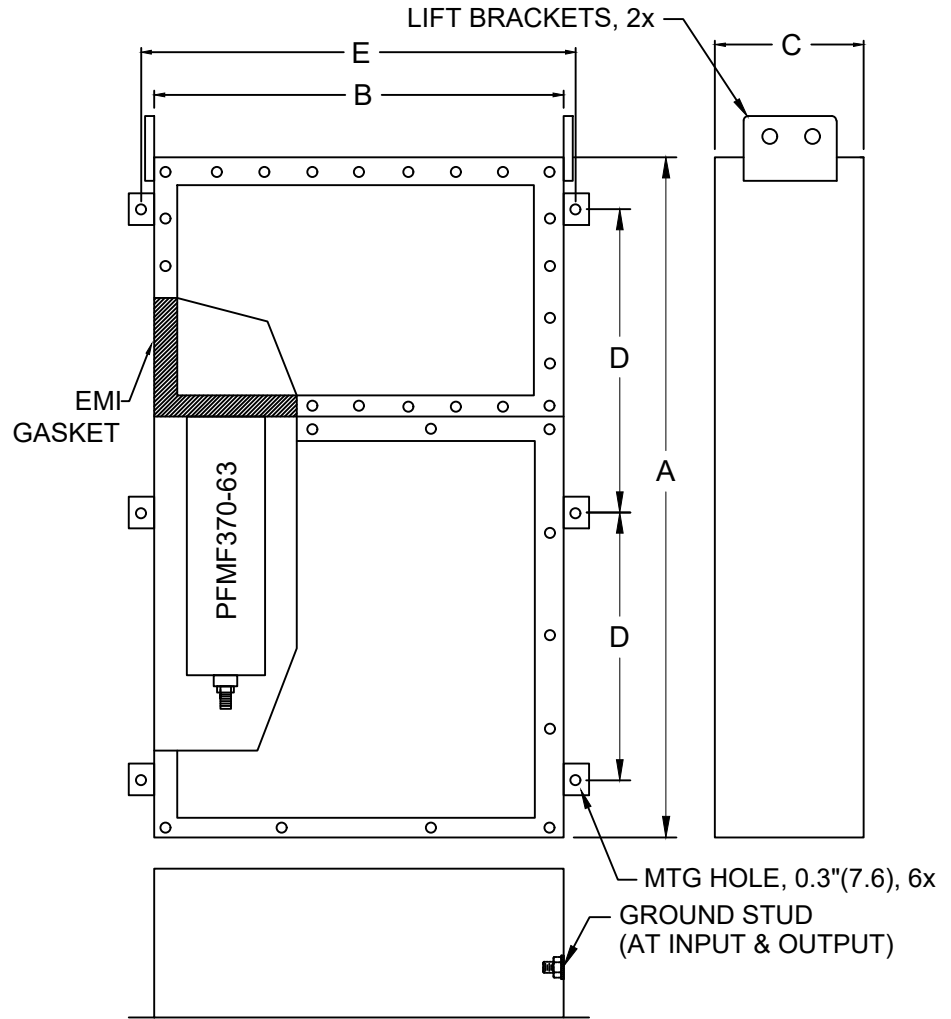

INPUT AND OUTPUT CONDUIT/WIRE PENETRATIONS BY END USER.

MODEL	AMPS	TERMINAL	DIMENSIONS (MM)					WEIGHT LBS(KG)	MTG LEGS
			A	B	C	D	E		
PFMF370-63-4	63	M10	1067	660	185	483	698	280 (127.3)	370100ML
			(42)	(26)	(7.3)	(19)	(27.5)		