



PFMF800LT-4

4-LINE SCIF/TEMPEST FILTER

ANALOG ALARM/CONTROL/LIGHTING

SPECIFICATIONS

MAX VOLTAGE: 0-300VAC/0-300VDC

OPERATING FREQUENCY: DC-60HZ

RATED CURRENT: 5A/LINE

AMBIENT TEMP.: -40 TO 65C

HIPOT (L-G): 2265VDC

(PRIOR TO INSTALLING DISCHARGE RESISTORS)

DISCHARGE VOLT. (@250V): <30V IN 30S

PERFORMANCE: 100dB (14KHZ TO 20GHZ)

TYP. WEIGHT, LB(KG): 11(5)

TERMINALS: M5 STUDS

MIL-STD-220

MIL-F-15733


MIL-STD-810

LV DIRECTIVE



CONFORMS TO
UL STD 1283

5025116

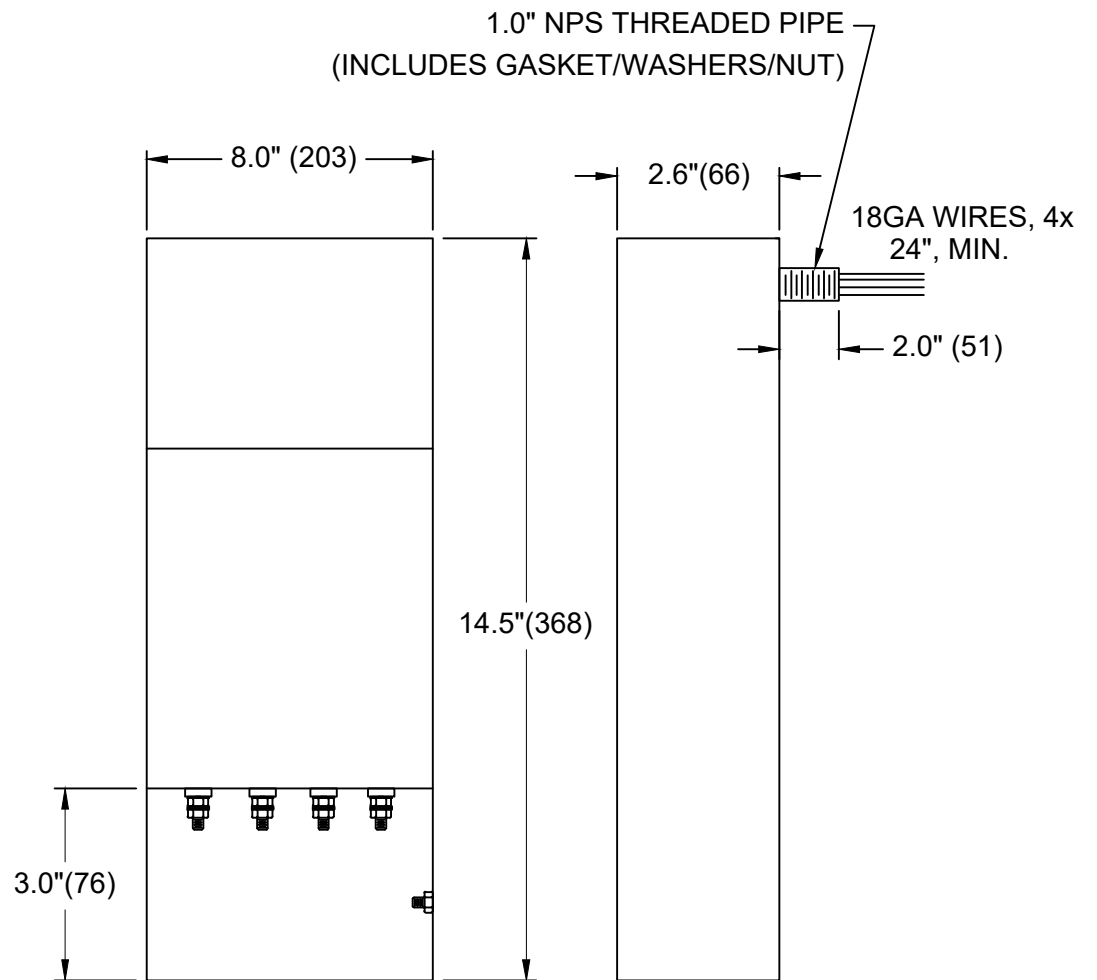

(COVER REMOVED FOR CLARITY)

