




PFMF850DLT-2
2-LINE DATA SCIF/FACILITY FILTER
(E.G. AC MINI-SPLIT, DIGITAL ALARM)
DC-140KHZ PASSBAND
600/300 OHMS (L-L/L-G)

SPECIFICATIONS

MAX VOLTAGE: 0-250VAC/0-250VDC
OPERATING FREQUENCY: DC-60HZ
RATED CURRENT: 5A/LINE
AMBIENT TEMP.: -40 TO 65C
HIPOT (L-G): 1000VDC
PERFORMANCE: 100dB (3MHZ TO 20GHZ)
LINE TERMINALS: M5 STUDS
LOAD TERMINALS: 18GA WIRES
TYP. WEIGHT, LBS(KG): 8(3.6)

ADDITIONAL DETAILS:

- 1. FOR INDOOR CONTROLLED ENVIRONMENTS
- 2. ALL EMI SEAMS 100% WELDED
- 3. FOR DIFFERENT CONDUIT CUTOUT OR HOLE LOCATION, CONSULT FACTORY

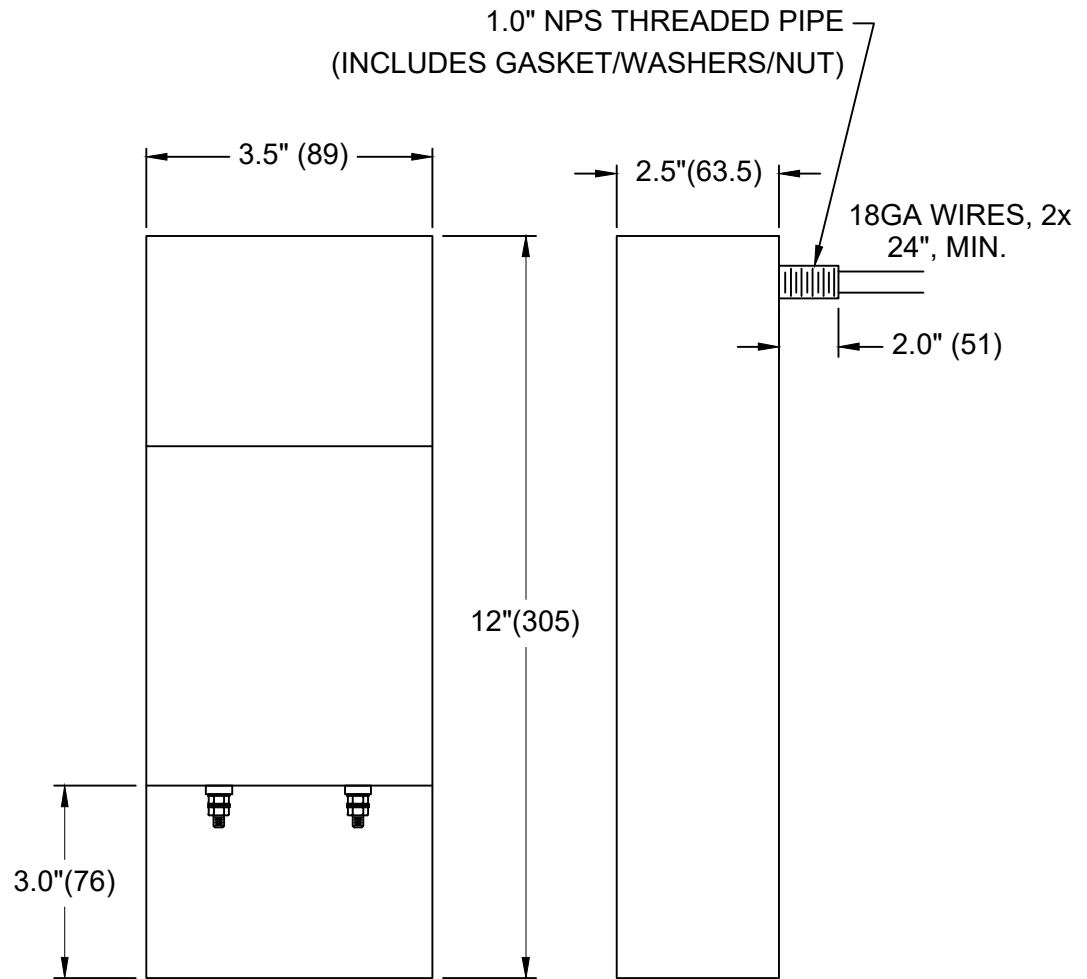

(COVER REMOVED FOR CLARITY)

