




**PFMF850DLT-4**  
**4-LINE DATA SCIF/FACILITY FILTER**  
**(E.G. AC MINI-SPLIT, DIGITAL ALARM)**  
**DC-140KHZ PASSBAND**  
**600/300 OHMS (L-L/L-G)**

**SPECIFICATIONS**

MAX VOLTAGE: 0-250VAC/0-250VDC  
OPERATING FREQUENCY: DC-60HZ  
RATED CURRENT: 5A/LINE  
AMBIENT TEMP.: -40 TO 65C  
HIPOT (L-G): 1000VDC  
PERFORMANCE: 100dB (3MHZ TO 20GHZ)  
LINE TERMINALS: M5 STUDS  
LOAD TERMINALS: 18GA WIRES  
TYP. WEIGHT, LBS(KG): 11(5)

**ADDITIONAL DETAILS:**

- 1. FOR INDOOR CONTROLLED ENVIRONMENTS
- 2. ALL EMI SEAMS 100% WELDED
- 3. FOR DIFFERENT CONDUIT CUTOUT OR HOLE LOCATION, CONSULT FACTORY

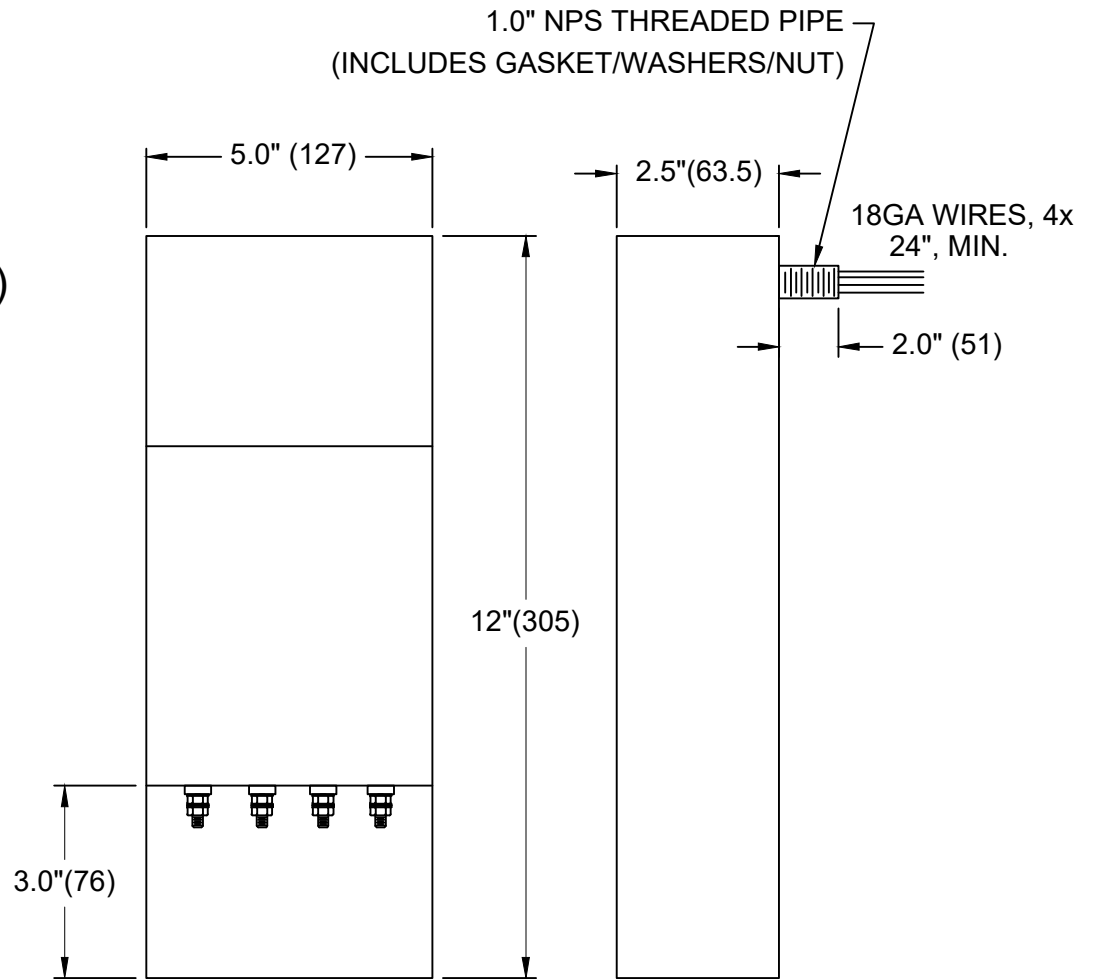

(COVER REMOVED FOR CLARITY)

