


**PFMF855DLT-2**  
**2-LINE DATA SCIF/FACILITY FILTER**  
 (E.G. 14/2 DIGITAL FIRE ALARM,  
 AC MINI-SPLIT, ETC.)  
 DC-140KHZ PASSBAND  
 600/300 OHMS (L-L/L-G)

**SPECIFICATIONS**

MAX VOLTAGE: 0-250VAC/0-250VDC  
 OPERATING FREQUENCY: DC-60HZ  
 RATED CURRENT: 10A/LINE  
 AMBIENT TEMP.: -40 TO 65C  
 HIPOT (L-G): 1000VDC  
 I/P TERMINALS: M5 STUDS  
 O/P TERMINALS: 14GA / 105C WIRES  
 PERFORMANCE: 100dB (3MHZ TO 20GHZ)  
 TYP. WEIGHT, LBS (KG): 8 (3.6)

**ADDITIONAL DETAILS:**

1. FOR INDOOR CONTROLLED ENVIRONMENTS
2. ALL EMI SEAMS 100% WELDED
3. FOR DIFFERENT CONDUIT CUTOUT OR HOLE LOCATION, CONSULT FACTORY

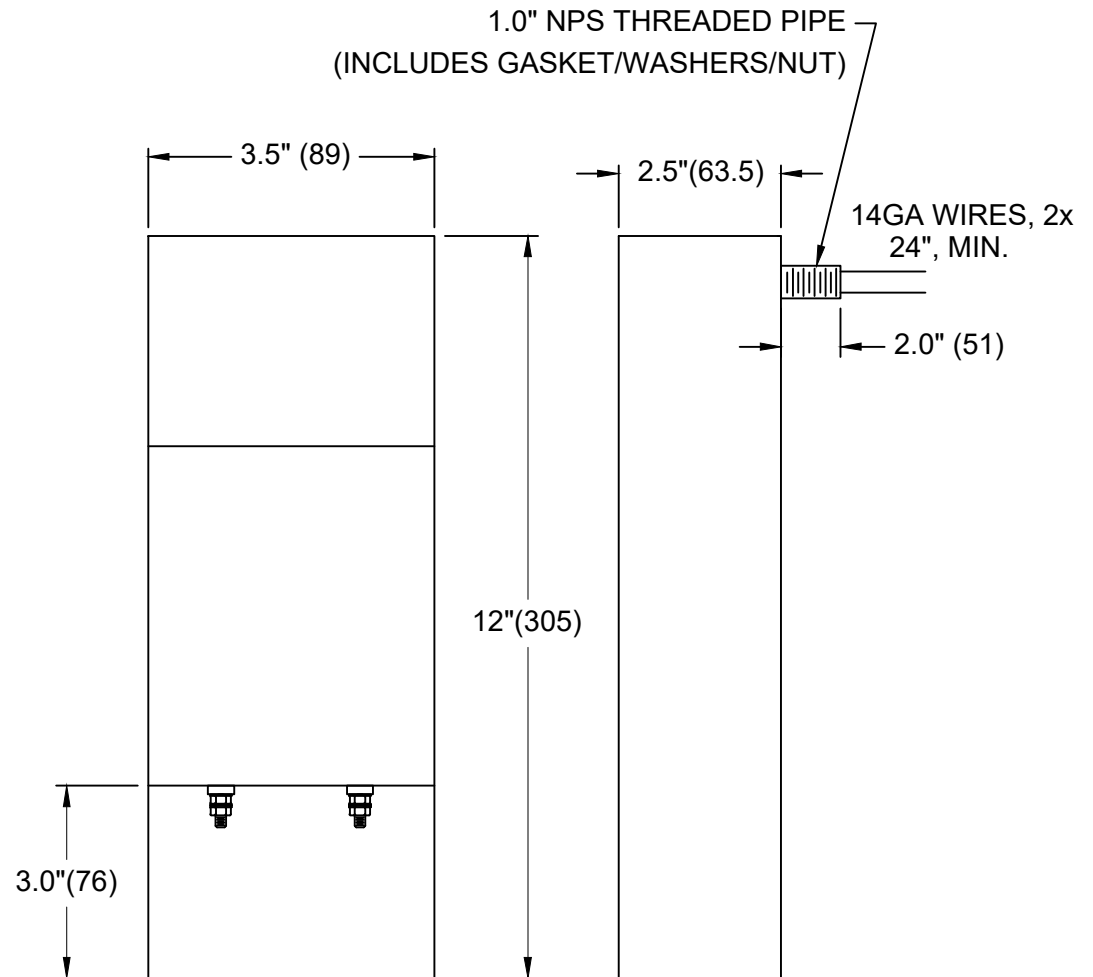

(COVER REMOVED FOR CLARITY)

