



PFMF855DLT-8
8-LINE DATA SCIF/FACILITY FILTER
(E.G. 14/2 DIGITAL FIRE ALARM,
AC MINI-SPLIT, ETC.)
DC-140KHZ PASSBAND
600/300 OHMS (L-L/L-G)


SPECIFICATIONS

MAX VOLTAGE: 0-250VAC/0-250VDC
OPERATING FREQUENCY: DC-60HZ
RATED CURRENT: 10A/LINE
AMBIENT TEMP.: -40 TO 65C
HIPOT (L-G): 1000VDC
I/P TERMINALS: M5 STUDS
O/P TERMINALS: 14GA / 105C WIRES
PERFORMANCE: 100dB (3MHZ TO 20GHZ)
TYP. WEIGHT, LBS (KG): 15(6.8)

ADDITIONAL DETAILS:

- 1. FOR INDOOR CONTROLLED ENVIRONMENTS
- 2. ALL EMI SEAMS 100% WELDED
- 3. FOR DIFFERENT CONDUIT CUTOUT OR HOLE LOCATION, CONSULT FACTORY

SPECIFICATIONS SUBJECT TO CHANGE

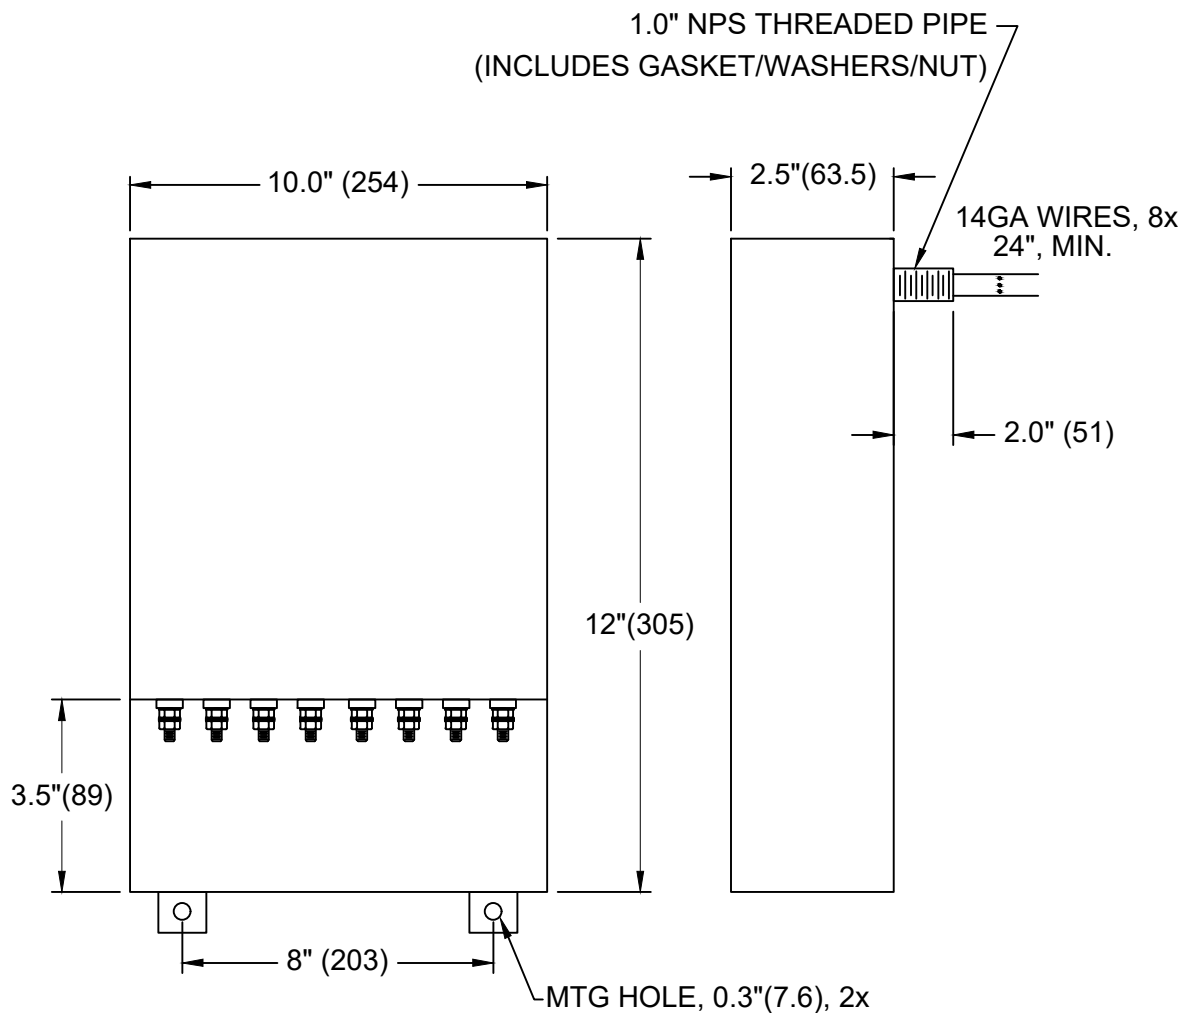

(COVER REMOVED FOR CLARITY)

