



PFMF857DLT-8
8-LINE DATA SCIF/TEMPEST FILTER
E.G. AC MINI-SPLIT, DIGITAL ALARM
DC-200KHZ PASSBAND
600/300 OHMS (L-L/L-G)


SPECIFICATIONS

- MAX VOLTAGE: 0-300VAC/0-300VDC
- OPERATING FREQUENCY: DC-60HZ
- RATED CURRENT: 20A/LINE
- AMBIENT TEMP.: -40 TO 65C
- HIPOT (L-G): 2265VDC
- TERMINALS: M5 STUDS
- PERFORMANCE: 100dB (3MHZ TO 20GHZ)
- TYP. WEIGHT, LBS (KG): 15(6.8)

- MIL-STD-220
- MIL-F-15733
- MIL-STD-810
- LV DIRECTIVE



CONFORMS TO
 UL STD 1283

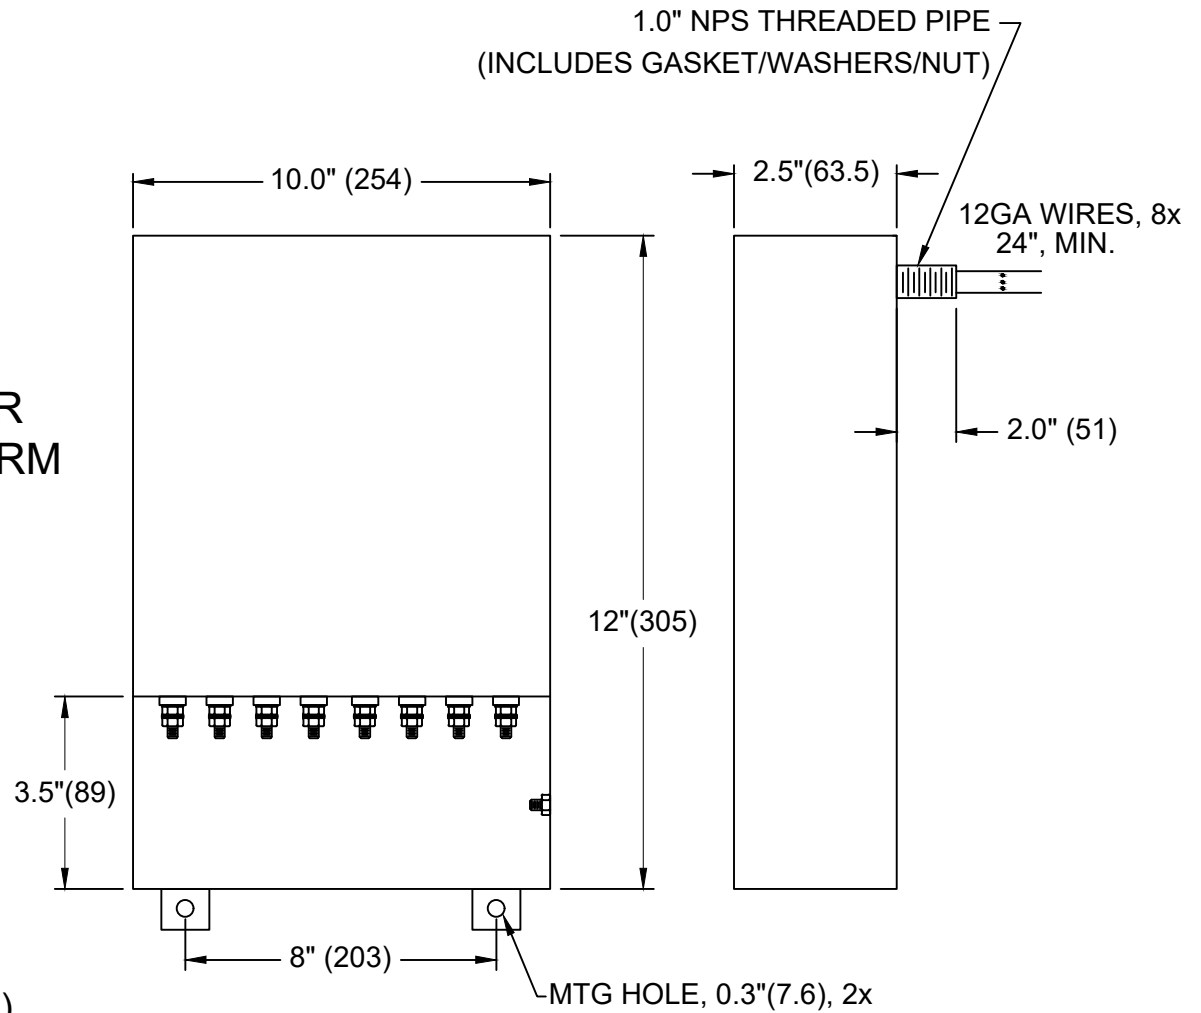

(COVER REMOVED FOR CLARITY)

