



PFMF880DLT-8
8-LINE DATA SCIF/TEMPEST FILTER
E.G. 128KB DATA
DC-300KHZ PASSBAND
150/75 OHMS (L-L/L-G)

SPECIFICATIONS

MAX VOLTAGE: 0-300VAC/0-300VDC
OPERATING FREQUENCY: DC-60HZ
RATED CURRENT: 5A/LINE
AMBIENT TEMP.: -40 TO 65C
HIPOT (L-G): 2265VDC
TERMINALS: M5 STUDS
PERFORMANCE: 100dB (5MHZ TO 20GHZ)
TYP. WEIGHT, LBS (KG): 15 (6.8)

MIL-STD-220


MIL-F-15733

MIL-STD-810

LV DIRECTIVE



CONFORMS TO
UL STD 1283

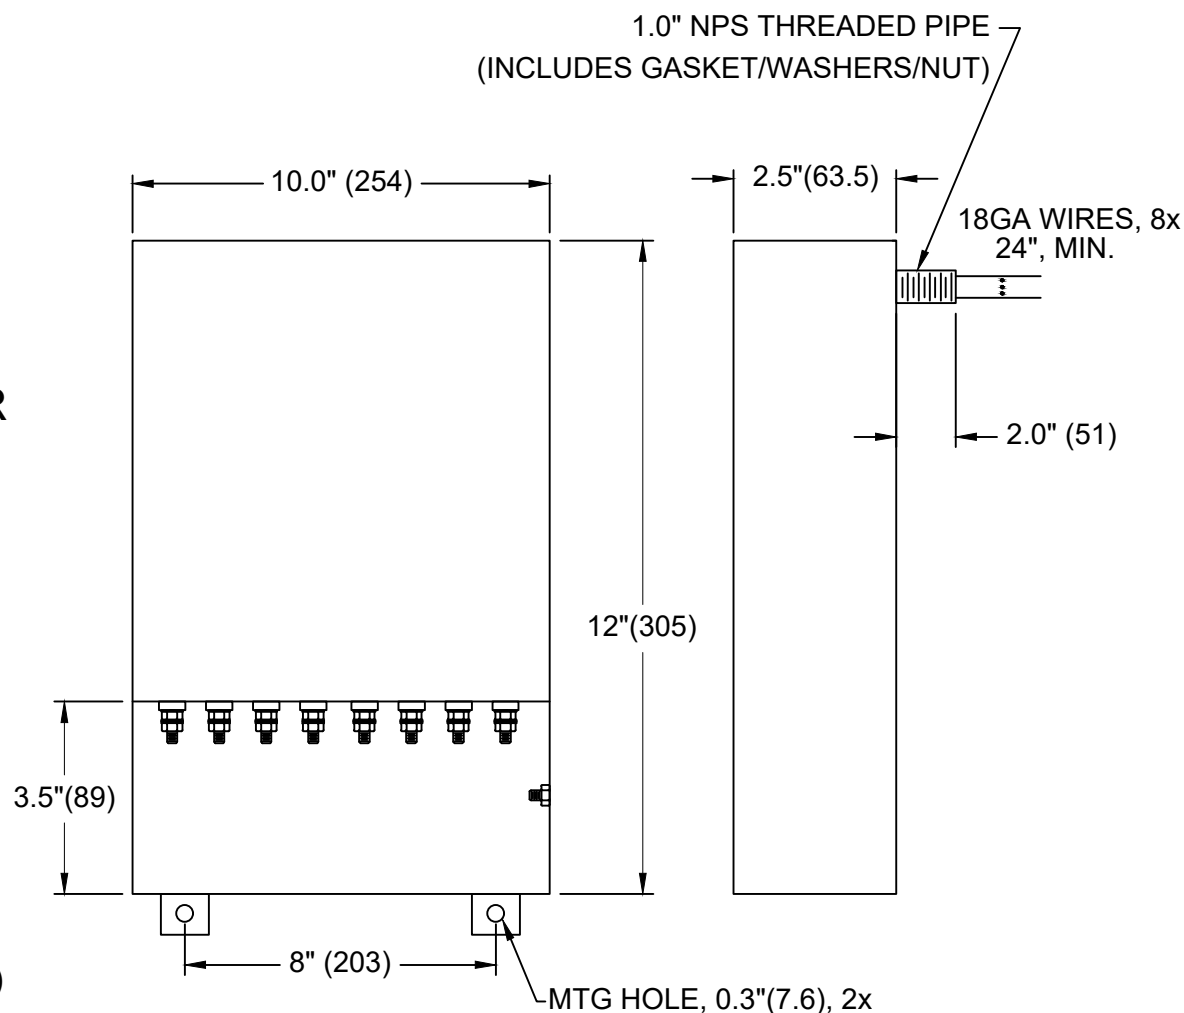

(COVER REMOVED FOR CLARITY)

