



**PFMF880DLT-8**  
**8-LINE DATA SCIF/FACILITY FILTER**  
(E.G. 128KB DATA)  
DC-300KHZ PASSBAND  
150/75 OHMS (L-L/L-G)


**SPECIFICATIONS**

MAX VOLTAGE: 0-250VAC/0-250VDC  
OPERATING FREQUENCY: DC-60HZ  
RATED CURRENT: 4A/LINE  
AMBIENT TEMP.: -40 TO 65C  
HIPOT (L-G): 1000VDC  
TERMINALS: M5  
PERFORMANCE: 100dB (5MHZ TO 20GHZ)  
TYP. WEIGHT, LBS (KG): 15 (6.8)

**ADDITIONAL DETAILS:**

1. FOR INDOOR CONTROLLED ENVIRONMENTS
2. ALL EMI SEAMS 100% WELDED
3. FOR DIFFERENT CONDUIT CUTOUT OR HOLE LOCATION, CONSULT FACTORY

SPECIFICATIONS SUBJECT TO CHANGE

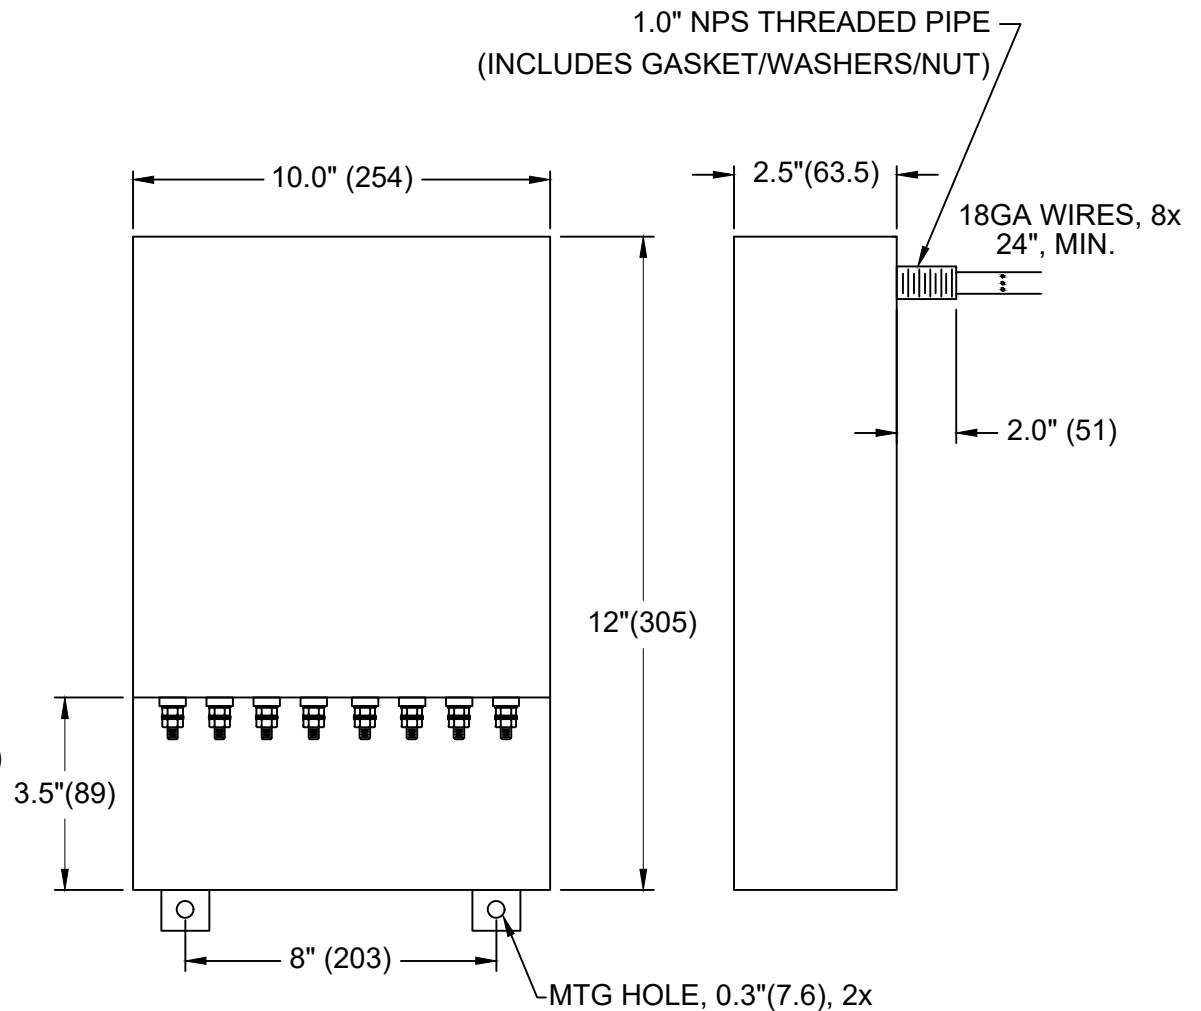

(COVER REMOVED FOR CLARITY)

