



PFMF890DLT-2
2-LINE DATA SCIF/TEMPEST FILTER
TELEPHONE / VOICE
DC-15KHZ PASSBAND
600/300 OHMS (L-L/L-G)

SPECIFICATIONS


MAX VOLTAGE: 0-300VAC/0-300VDC
OPERATING FREQUENCY: DC-60HZ
RATED CURRENT: 1A/LINE
AMBIENT TEMP.: -40 TO 65C
HIPOT (L-G): 2265VDC
TERMINALS: M5 STUDS
PERFORMANCE: 100dB (220KHZ TO 20GHZ)
TYP. WEIGHT, LBS (KG): 8 (3.6)

MIL-STD-220
MIL-F-15733
MIL-STD-810
LV DIRECTIVE




CONFORMS TO
UL STD 1283

SPECIFICATIONS SUBJECT TO CHANGE

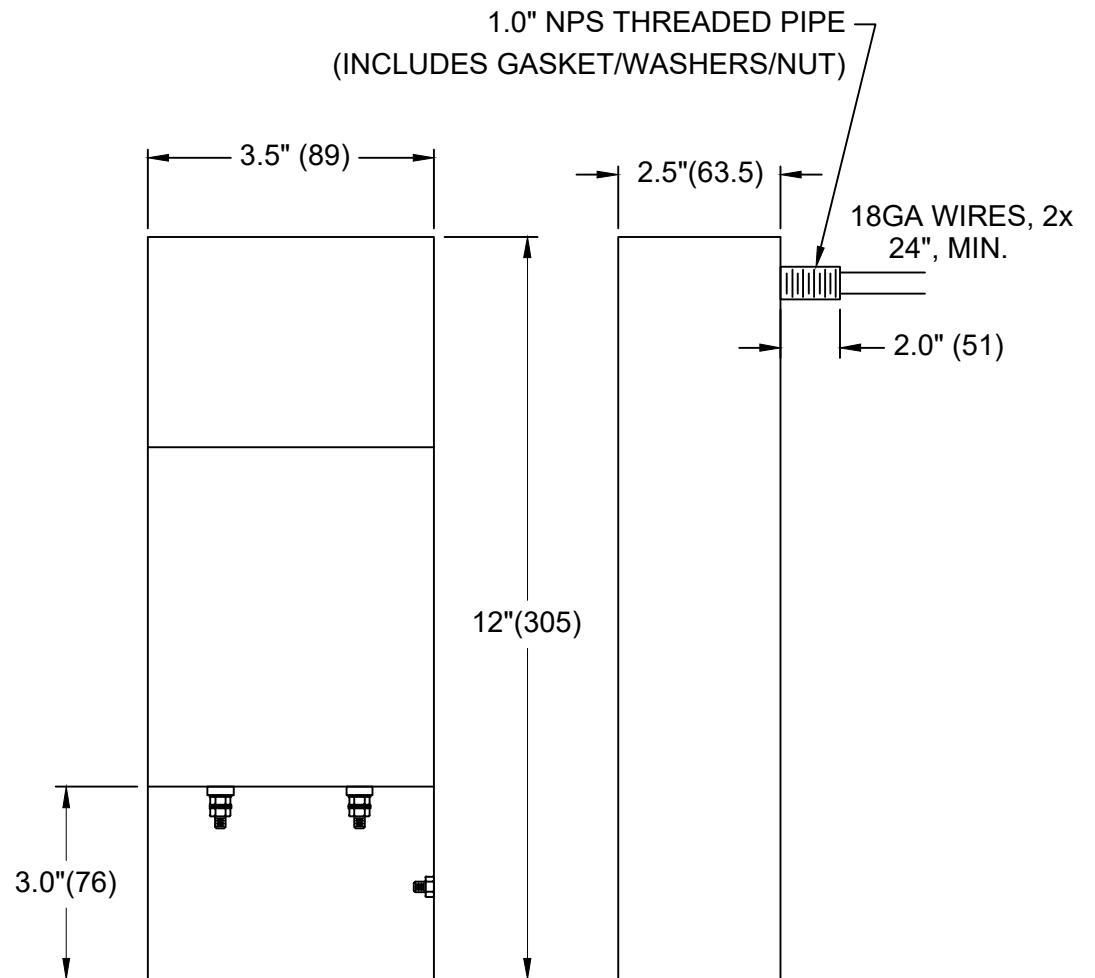

(COVER REMOVED FOR CLARITY)

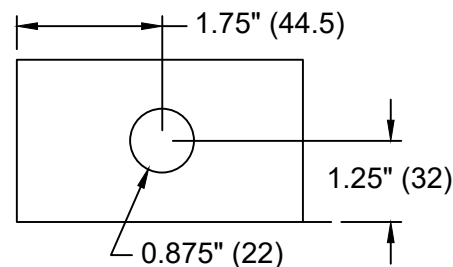

(CUTOUT FOR 0.5" CONDUIT)