

**PFMF920MR-63-1**  
**1-LINE + GND MRI FACILITY FILTER**

**SPECIFICATIONS**


- MAX VOLTAGE: 0-277/0-480VAC
- MAX CURRENT: 63A
- FREQUENCY: 50/60HZ
- OPERATING TEMP.: -40 TO 65C
- HIPOT (L-G): 2200VDC
- (PRIOR TO INSTALLING DISCHARGE RESISTORS)
- DISCHARGE VOLT. (@277V): <30V IN 30S
- VOLT. DROP: <1% MAX AT FULL RATED UNITY LOAD
- PERFORMANCE: >100dB (5MHZ TO 20GHZ)
- MANUFACTURED IN ACCORDANCE WITH THE FOLLOWING STANDARDS:

MIL-STD-220  
 MIL-F-15733  
 LV DIRECTIVE



CONFORMS TO  
 UL STD 1283

FOR DIFFERENT CUTOUT SIZES OR LOCATIONS, CONSULT FACTORY  
 (OUTPUT PIPE INCLUDES ALL HARDWARE AND GASKET)

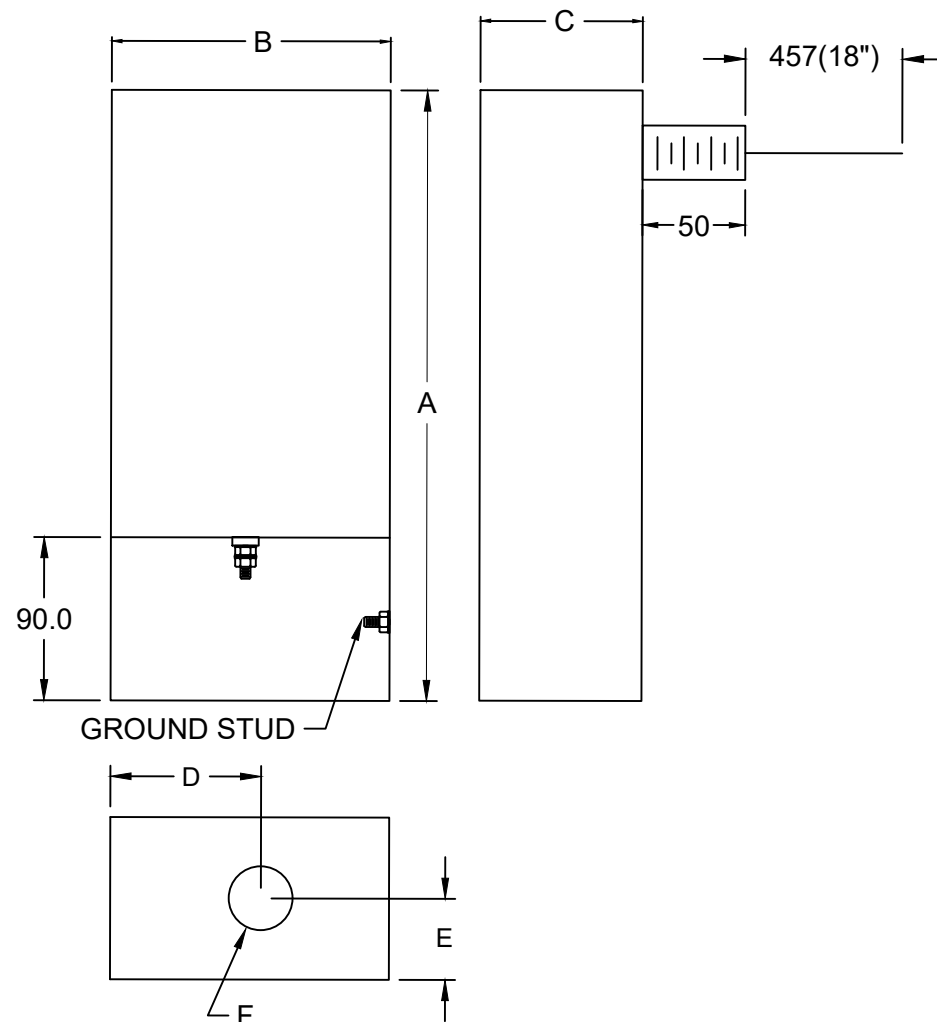

| MODEL          | AMPS | TERMINAL | DIMENSIONS - MM (IN) |     |       |       |        |        | WEIGHT LBS(KG) | O/P PIPE | O/P WIRE(GA) |
|----------------|------|----------|----------------------|-----|-------|-------|--------|--------|----------------|----------|--------------|
|                |      |          | A                    | B   | C     | D     | E      | F      |                |          |              |
| PFMF920MR-63-1 | 63   | M5       | 305                  | 76  | 64    | 38    | 32     | 35     | 4.4 (2)        | 1.0" NPS | 6            |
|                |      |          | (12)                 | (3) | (2.5) | (1.5) | (1.26) | (1.38) |                |          |              |