



PFMF920MR-63-2
2-LINE + GND MRI FACILITY FILTER


SPECIFICATIONS

- MAX VOLTAGE: 0-277/0-480VAC
- MAX CURRENT: 63A/LINE
- FREQUENCY: 50/60HZ
- OPERATING TEMP.: -40 TO 65C
- HI POT (L-G): 2200VDC
 (PRIOR TO INSTALLING DISCHARGE RESISTORS)
- DISCHARGE VOLT. (@277V): <30V IN 30S
- VOLT. DROP: <1% MAX AT FULL RATED UNITY LOAD
- PERFORMANCE: >100dB (5MHZ TO 20GHZ)
- MANUFACTURED IN ACCORDANCE WITH
 THE FOLLOWING STANDARDS:

MIL-STD-220
 MIL-F-15733
 LV DIRECTIVE



CONFORMS TO
 UL STD 1283

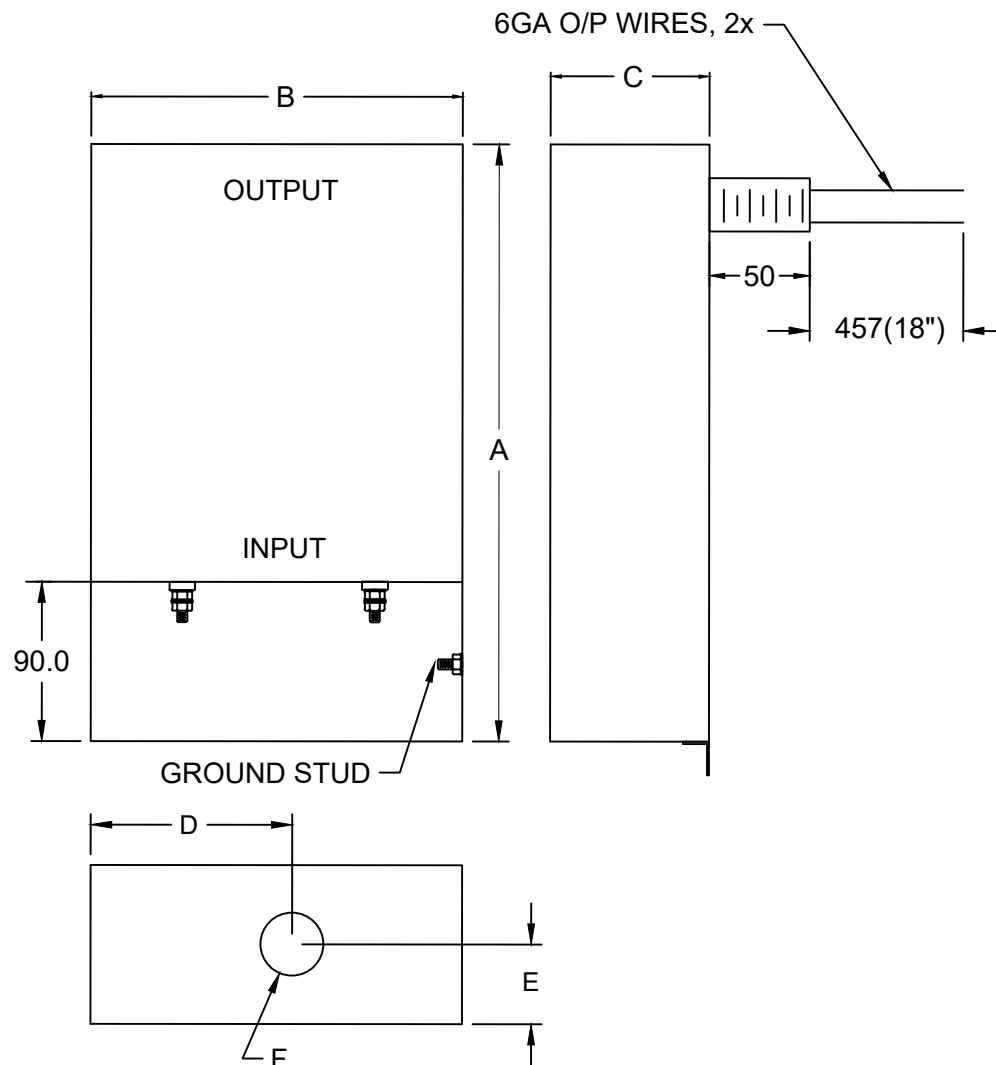

FOR DIFFERENT CUTOUT SIZES OR LOCATIONS, CONSULT FACTORY
 (OUTPUT PIPE INCLUDES ALL HARDWARE AND GASKET)

MODEL	AMPS	TERMINAL	DIMENSIONS, MM(IN)						WEIGHT LBS(KG)	O/P PIPE	O/P WIRE(GA)
			A	B	C	D	E	F			
PFMF920MR-63-2	63	M5	305	102	76	51	38	35	8.8 (4)	1.0" NPS	6
			(12)	(4)	(3)	(2)	(1.5)	(1.38)			