

PFMT200S-60

2-LINE TEMPEST FILTER

60dB@14KHZ

100dB@100KHZ

SPECIFICATIONS

MAX VOLTAGE: 0-300VAC

MAX CURRENT: 60A/LINE

FREQUENCY: 50/60HZ

OPERATING TEMP.: -40 TO 70C

HI POT (L-G): 1500VDC

(PRIOR TO ADDING DISCHARGE RESISTORS)

DISCHARGE VOLT. (@120V): <30V IN 30S

PERFORMANCE: >60dB (14KHZ TO 100KHZ)

>100dB (100KHZ TO 20GHZ)

DESIGNED IN ACCORDANCE WITH THE


FOLLOWING STANDARDS:

UL1283

MIL-STD-220

MIL-F-15733

LV DIRECTIVE

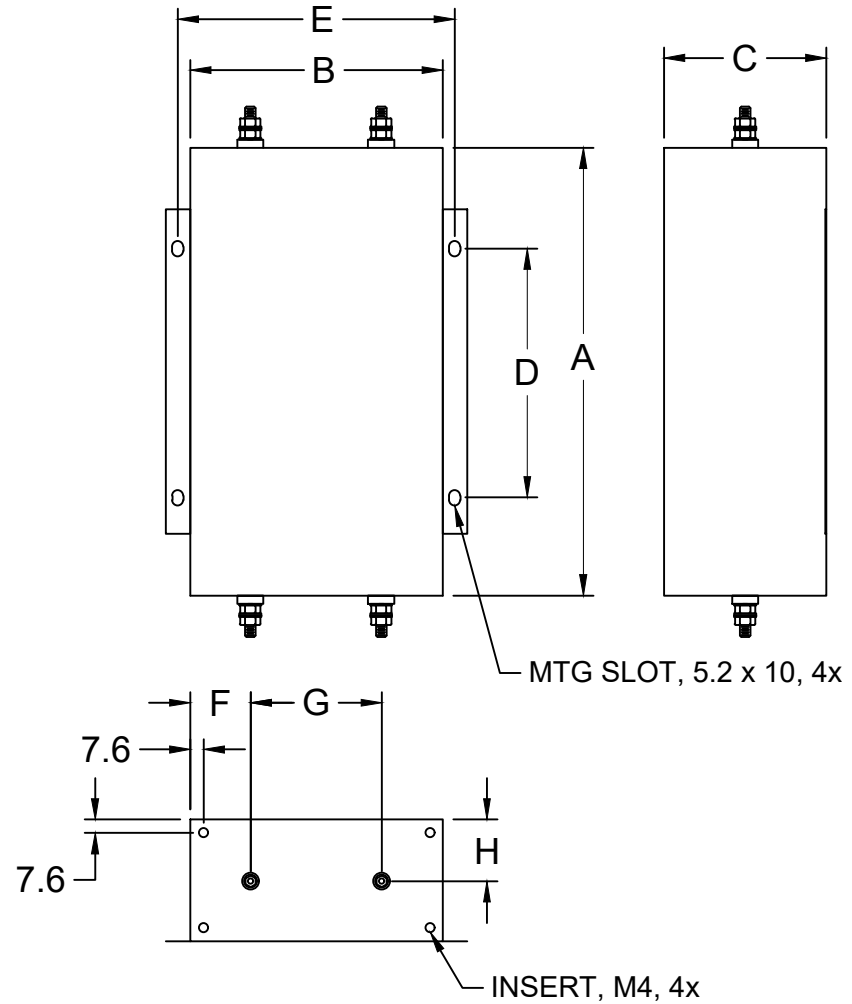

MODEL	AMPS	TERMINALS	DIMENSIONS - MM (IN)								WEIGHT LBS(KG)
			A	B	C	D	E	F	G	H	
PFMT200S-60	60	M5	127	102	76	63.5	114	34.5	33	38	4.0 (1.8)
			(5)	(4)	(3)	(2.5)	(4.5)	(1.36)	(1.3)	(1.5)	