

PFMT222S-63
2-LINE + GND TEMPEST FILTER
100dB@10KHZ


SPECIFICATIONS

MAX VOLTAGE: 0-277/0-480VAC
 MAX CURRENT: 63A/LINE
 FREQUENCY: 50/60HZ
 OPERATING TEMP.: -40 TO 70C
 HIPOT (L-G): 2200VDC
 (PRIOR TO INSTALLING DISCHARGE RESISTORS)
 DISCHARGE VOLT. (@277V): <30V IN 30S
 OVERLOAD: 140% RATED CURRENT FOR 15 MINUTES
 PERFORMANCE: >100dB (10KHZ TO 20GHZ)
 DESIGNED IN ACCORDANCE WITH THE
 FOLLOWING STANDARDS:

MIL-STD-220
 MIL-F-15733
 MIL-STD-810
 LV DIRECTIVE



CONFORMS TO
 UL STD 1283

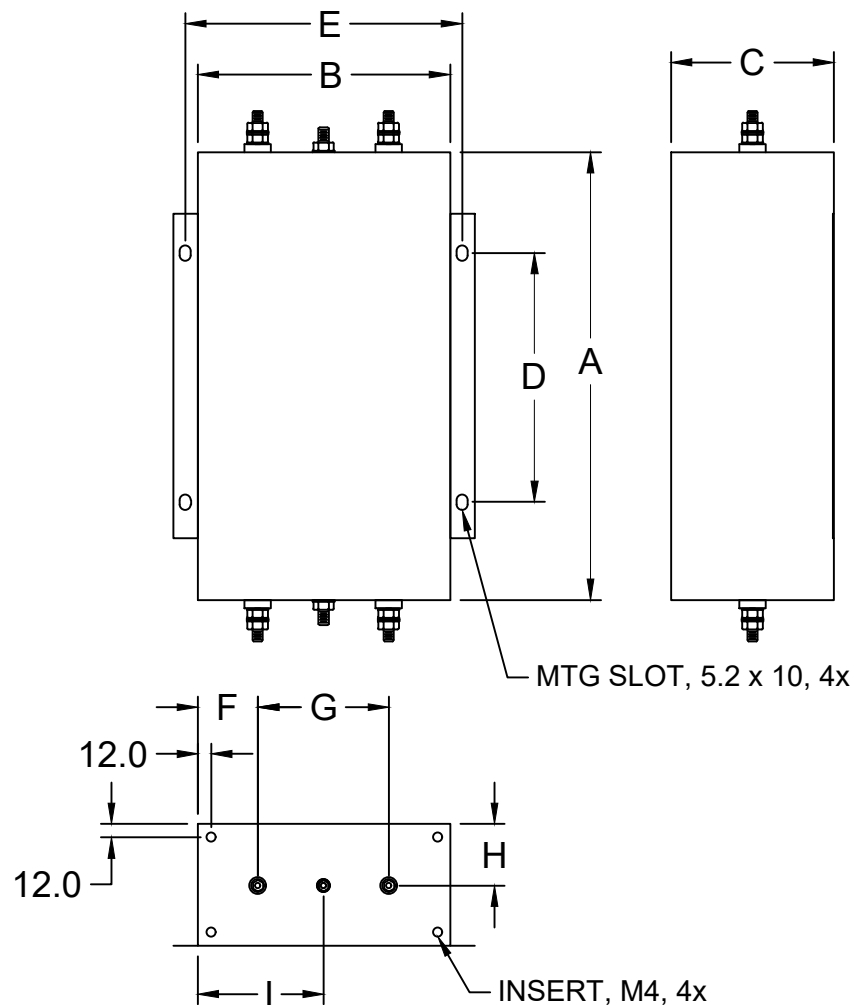

MODEL	AMPS	TERMINALS	DIMENSIONS (MM)										WEIGHT LBS(KG)
			A	B	C	D	E	F	G	H	I		
PFMT222S-63	63	M5	140	115	76	90	135	35	45	38	57.5	6.0 (2.7)	
			(5.5)	(4.5)	(3)	(3.5)	(5.3)	(1.38)	(1.77)	(1.5)	(2.26)		