

PFMT230S-10
3-LINE TEMPEST FILTER
60dB@14KHZ
100dB@100KHZ

SPECIFICATIONS

MAX VOLTAGE: 0-277/0-480VAC

MAX CURRENT: 10A/LINE

FREQUENCY: 50/60HZ

OPERATING TEMP.: -40 TO 70C

HIPOT (L-G): 1500VDC

(PRIOR TO ADDING DISCHARGE RESISTORS)

DISCHARGE VOLT. (@277V): <30V IN 30S

PERFORMANCE: >60dB (14KHZ TO 100KHZ)
 >100dB (100KHZ TO 20GHZ)


DESIGNED IN ACCORDANCE WITH THE
 FOLLOWING STANDARDS:

UL1283

MIL-STD-220

MIL-F-15733

LV DIRECTIVE

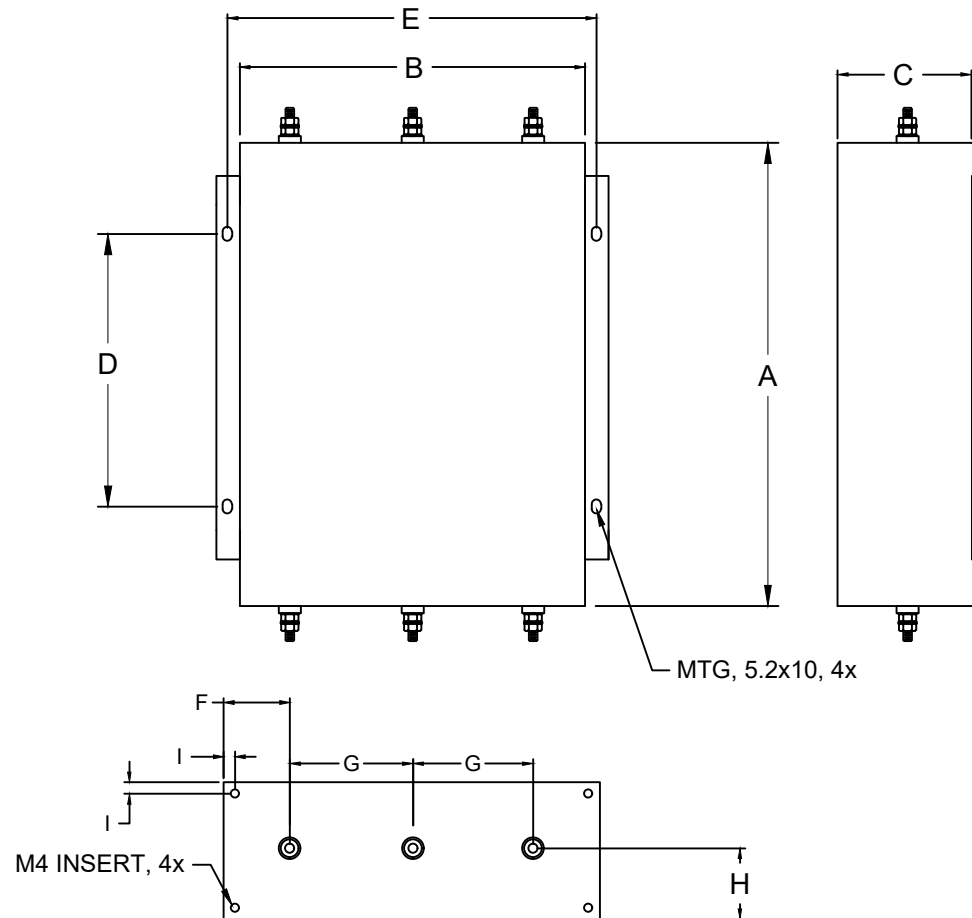

MODEL	AMPS	TERMINALS	DIMENSIONS - MM (IN)									WEIGHT LBS(KG)
			A	B	C	D	E	F	G	H	I	
PFMT230S-10	10	M5	127	102	76	76	114	25.4	25.4	38	7.6	7.5(3.4)
			(5)	(4)	(3)	(3)	(4.5)	(1)	(1)	(1.5)	(0.3)	