


PFMT230S-30
3-LINE TEMPEST FILTER
60dB@14KHZ
100dB@100KHZ

SPECIFICATIONS

MAX VOLTAGE: 0-277/0-480VAC
 MAX CURRENT: 30A/LINE
 FREQUENCY: 50/60HZ
 OPERATING TEMP.: -40 TO 70C
 HIPOT (L-G): 1500VDC
 (PRIOR TO ADDING DISCHARGE RESISTORS)
 DISCHARGE VOLT. (@277V): <30V IN 30S
 PERFORMANCE: >60dB (14KHZ TO 100KHZ)
 >100dB (100KHZ TO 20GHZ)
 DESIGNED IN ACCORDANCE WITH THE
 FOLLOWING STANDARDS:
 UL1283
 MIL-STD-220
 MIL-F-15733
 LV DIRECTIVE

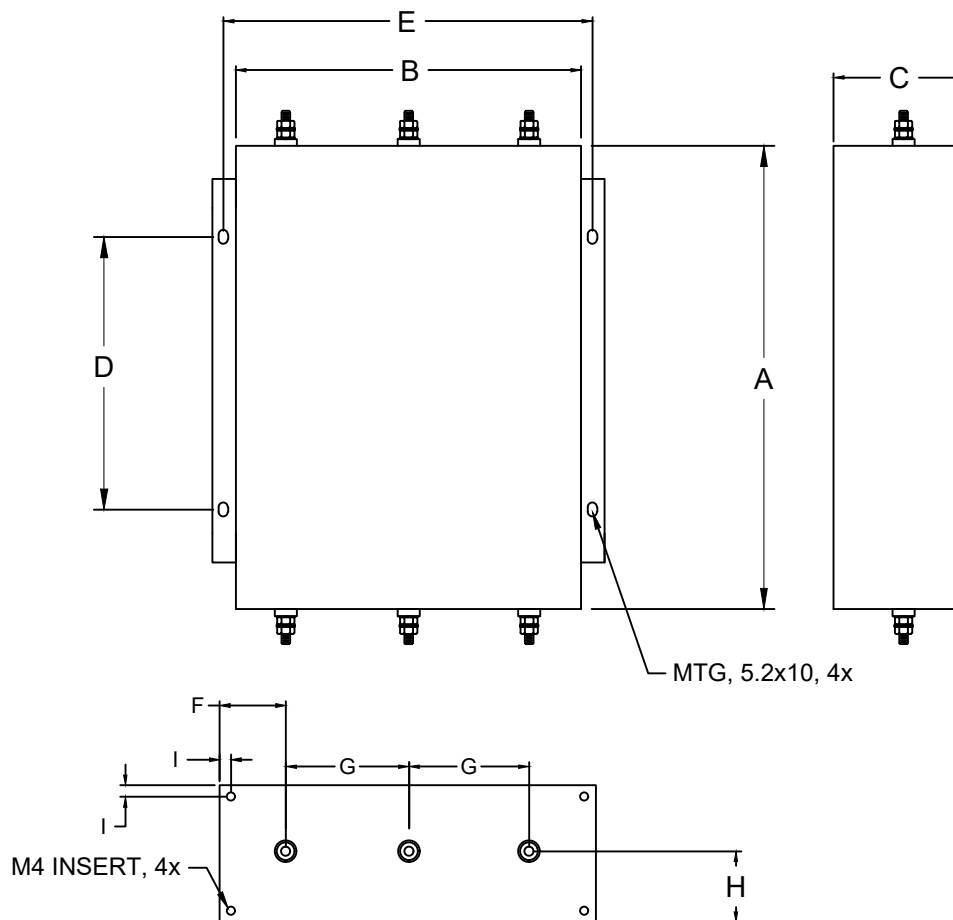

MODEL	AMPS	TERMINALS	DIMENSIONS - MM (IN)									WEIGHT LBS(KG)
			A	B	C	D	E	F	G	H	I	
PFMT230S-30	30	M5	127	102	76	76	114	25.4	25.4	38	7.6	7.5(3.4)
			(5)	(4)	(3)	(3)	(4.5)	(1)	(1)	(1.5)	(0.3)	