


PFMT232S-100
3-LINE TEMPEST FILTER
100dB@14KHZ

SPECIFICATIONS

MAX VOLTAGE: 0-277/0-480VAC
 MAX CURRENT: 100A/LINE
 FREQUENCY: 50/60HZ
 OPERATING TEMP.: -40 TO 70C
 HIPOT (L-G): 1500VDC
 (PRIOR TO ADDING DISCHARGE RESISTORS)
 DISCHARGE VOLT. (@277V): <30V IN 30S
 PERFORMANCE: >100dB (14KHZ TO 20GHZ)
 DESIGNED IN ACCORDANCE WITH THE
 FOLLOWING STANDARDS:
 UL1283
 MIL-STD-220
 MIL-F-15733
 LV DIRECTIVE

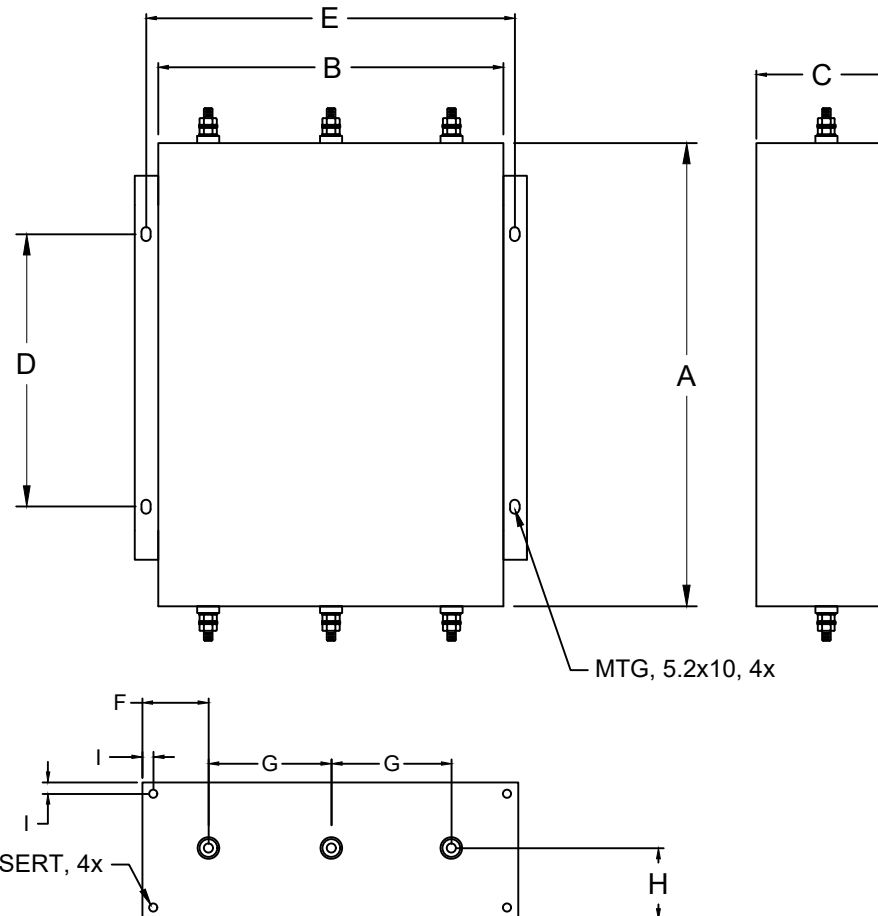

MODEL	AMPS	TERMINALS	DIMENSIONS - MM (IN)									WEIGHT LBS(KG)
			A	B	C	D	E	F	G	H	I	
PFMT232S-100	100	M6	254	152	127	203	178	38	38	63.5	12.7	23(10.5)
			(10)	(6)	(5)	(8)	(7)	(1.5)	(1.5)	(2.5)	(0.5)	