


PFMT240S-60
4-LINE TEMPEST FILTER
60dB@14KHZ
100dB@100KHZ

SPECIFICATIONS

MAX VOLTAGE: 0-277/0-480VAC
 MAX CURRENT: 60A/LINE
 FREQUENCY: 50/60HZ
 OPERATING TEMP.: -40 TO 70C
 HIPOT (L-G): 1500VDC
 (PRIOR TO ADDING DISCHARGE RESISTORS)
 DISCHARGE VOLT. (@277V): <30V IN 30S
 PERFORMANCE: >60dB (14KHZ TO 100KHZ)
 >100dB (100KHZ TO 20GHZ)

DESIGNED IN ACCORDANCE WITH THE
 FOLLOWING STANDARDS:

- UL1283
- MIL-STD-220
- MIL-F-15733
- LV DIRECTIVE

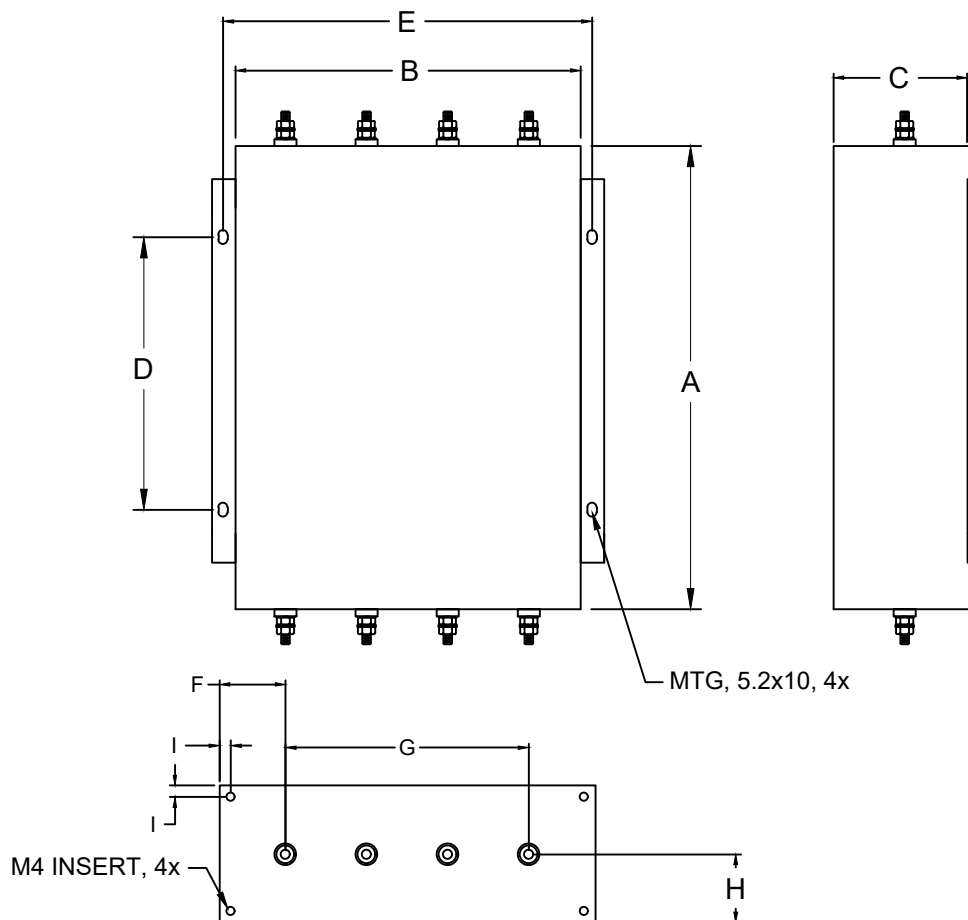

MODEL	AMPS	TERMINALS	DIMENSIONS - MM (IN)									WEIGHT LBS(KG)
			A	B	C	D	E	F	G	H	I	
PFMT240S-60	60	M5	203	152	127	152	178	30	91	63.5	12.7	22(10)
			(8)	(6)	(5)	(6)	(7)	(1.2)	(3.6)	(2.5)	(0.5)	