

PFMT242S-60
4-LINE TEMPEST FILTER
100dB@14KHZ

SPECIFICATIONS

MAX VOLTAGE: 0-277/0-480VAC

MAX CURRENT: 60A/LINE

FREQUENCY: 50/60HZ

OPERATING TEMP.: -40 TO 70C

HIPOT (L-G): 1500VDC

(PRIOR TO ADDING DISCHARGE RESISTORS)

DISCHARGE VOLT. (@277V): <30V IN 30S

PERFORMANCE: >100dB (14KHZ TO 20GHZ)


DESIGNED IN ACCORDANCE WITH THE
 FOLLOWING STANDARDS:

UL1283

MIL-STD-220

MIL-F-15733

LV DIRECTIVE

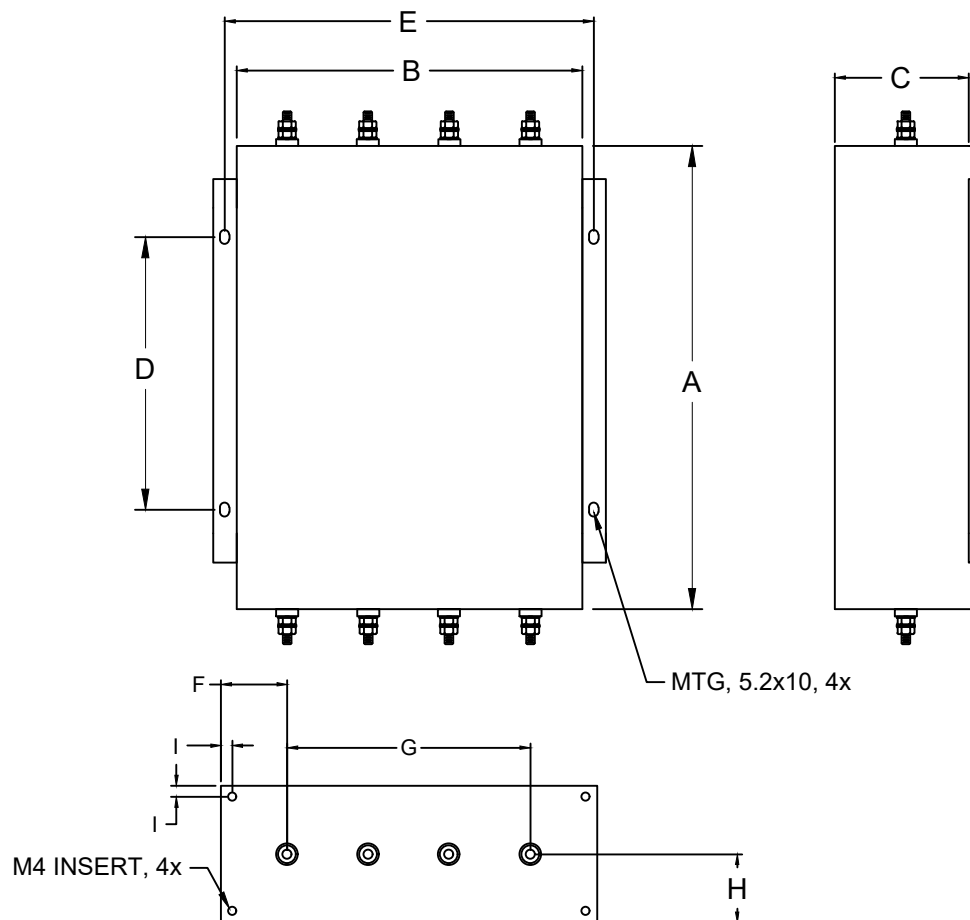

MODEL	AMPS	TERMINALS	DIMENSIONS - MM (IN)									WEIGHT LBS(KG)
			A	B	C	D	E	F	G	H	I	
PFMT242S-60	60	M5	203	152	127	152	178	30	91	63.5	12.7	22(10)
			(8)	(6)	(5)	(6)	(7)	(1.2)	(3.6)	(2.5)	(0.5)	