


PFMT255S-32
2-LINE + GND TEMPEST FILTER
INPUT/OUTPUT EMI COMPARTMENTS

SPECIFICATIONS

- MAX VOLTAGE: 0-277/0-480VAC
- MAX CURRENT: 32A/LINE
- FREQUENCY: 50/60HZ
- OPERATING TEMP.: -40 TO 70C
- HIPOT (L-G): 2200VDC
- (PRIOR TO INSTALLING DISCHARGE RESISTORS)
- DISCHARGE VOLT. (@277V): <30V IN 30S
- GROUND STUD PROVIDED IN INPUT & OUTPUT ACCESS AREAS
- PERFORMANCE: >100dB (10KHZ TO 40GHZ)
- MANUFACTURED IN ACCORDANCE WITH THE FOLLOWING STANDARDS:
 - UL1283
 - MIL-STD-220
 - MIL-F-15733
 - LV DIRECTIVE

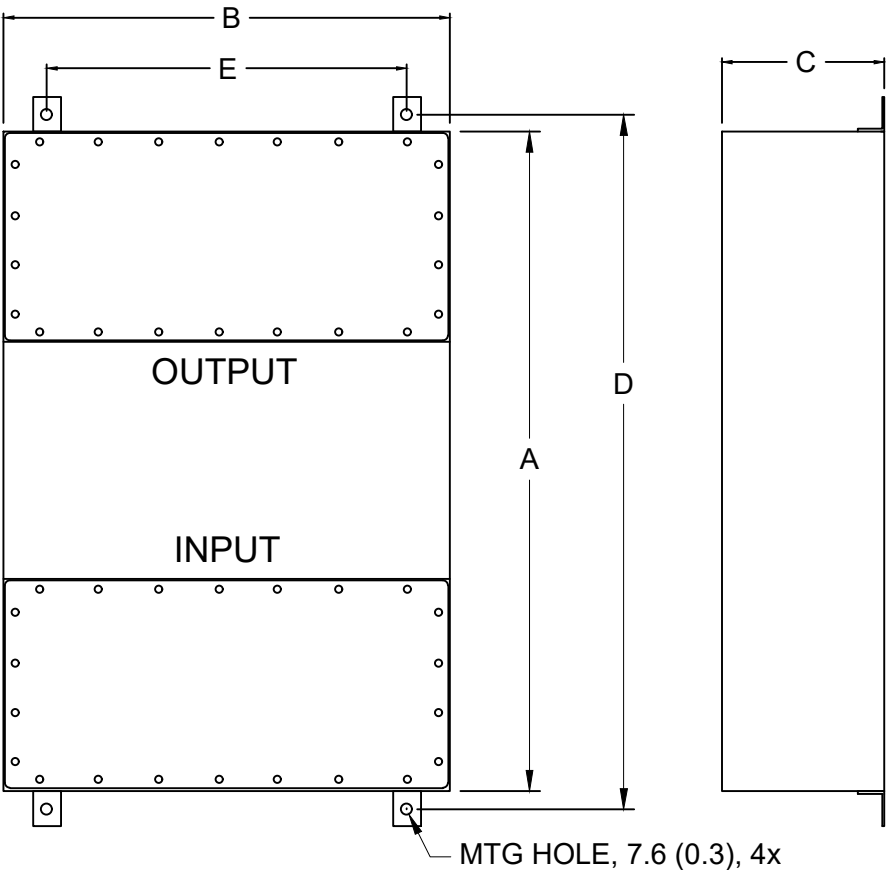

MODEL	AMPS	TERMINALS	DIMENSIONS - MM(IN)					WEIGHT LBS(KG)
			A	B	C	D	E	
PFMT255S-32	32	M6	432	178	102	472	127	19.8 (9)
			(17)	(7)	(4)	(18.6)	(5)	