

NOTE: LIFT BRACKETS PROVIDED ON CABINET

**PFMT355S-300**  
**3-LINE + GND TEMPEST FILTER**  
**INPUT/OUTPUT EMI COMPARTMENTS**

**SPECIFICATIONS**

MAX VOLTAGE: 0-277/0-480VAC

MAX CURRENT: 300A/LINE

FREQUENCY: 50/60HZ

OPERATING TEMP.: -40 TO 70C

HIPOT (L-G): 2200VDC

(PRIOR TO INSTALLING DISCHARGE RESISTORS)

DISCHARGE VOLT. (@277V): <30V IN 30S

OVERLOAD: 140% RATED CURRENT FOR 15 MINUTES

PERFORMANCE: >100dB (10KHZ TO 40GHZ)

MANUFACTURED IN ACCORDANCE WITH  
 THE FOLLOWING STANDARDS:

MIL-STD-220

MIL-F-15733


MIL-STD-810

LV DIRECTIVE



**Intertek**  
 5025116

CONFORMS TO  
 UL STD 1283

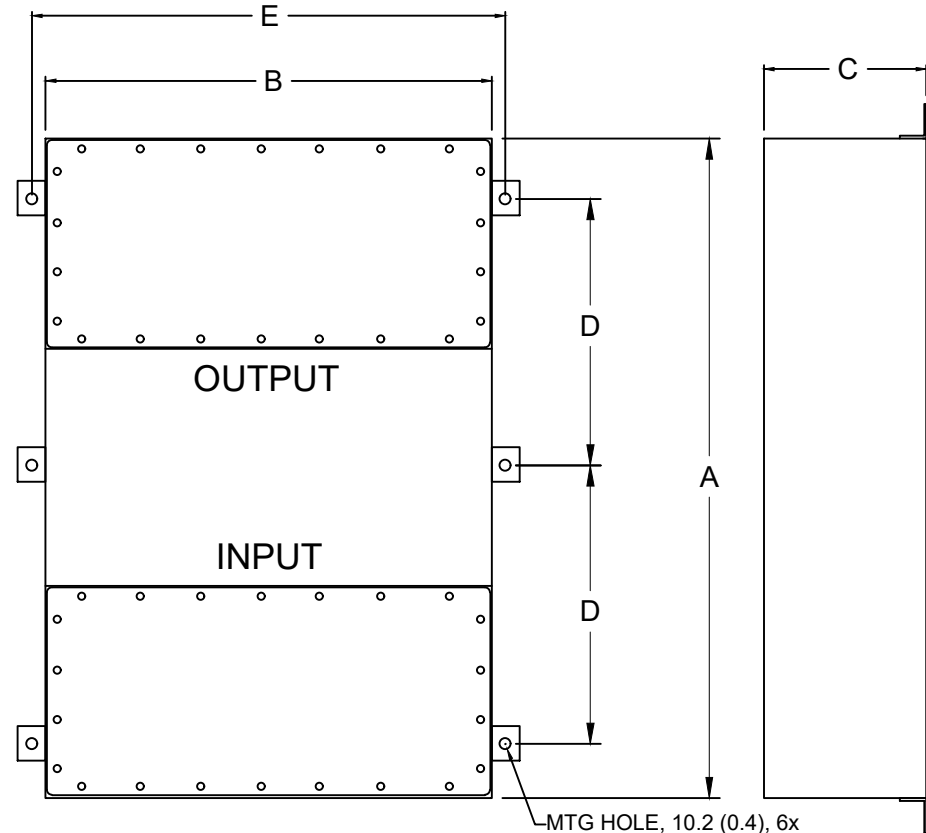

MODEL	AMPS	TERMINALS	DIMENSIONS - MM (IN)					WEIGHT LBS(KG)
			A	B	C	D	E	
PFMT355S-300	300	M16	1320	406	305	584	556	385(175)
			(52)	(16)	(12)	(23)	(18)	