


**PFMT4400S-10**  
**4-LINE + GND, 400HZ TEMPEST FILTER**

**SPECIFICATIONS**

MAX VOLTAGE: 0-277/0-480VAC  
 MAX CURRENT: 10A/LINE  
 FREQUENCY: 50/60/400HZ  
 OPERATING TEMP.: -40 TO 70C  
 HIPOT (L-G): 2200VDC  
 (PRIOR TO ADDING DISCHARGE RESISTORS)  
 DISCHARGE VOLT. (@277V): <30V IN 30S  
 PERFORMANCE: >100dB (14KHZ TO 20GHZ)  
 DESIGNED IN ACCORDANCE WITH THE  
 FOLLOWING STANDARDS:  
 UL1283  
 MIL-STD-220  
 MIL-F-15733  
 LV DIRECTIVE

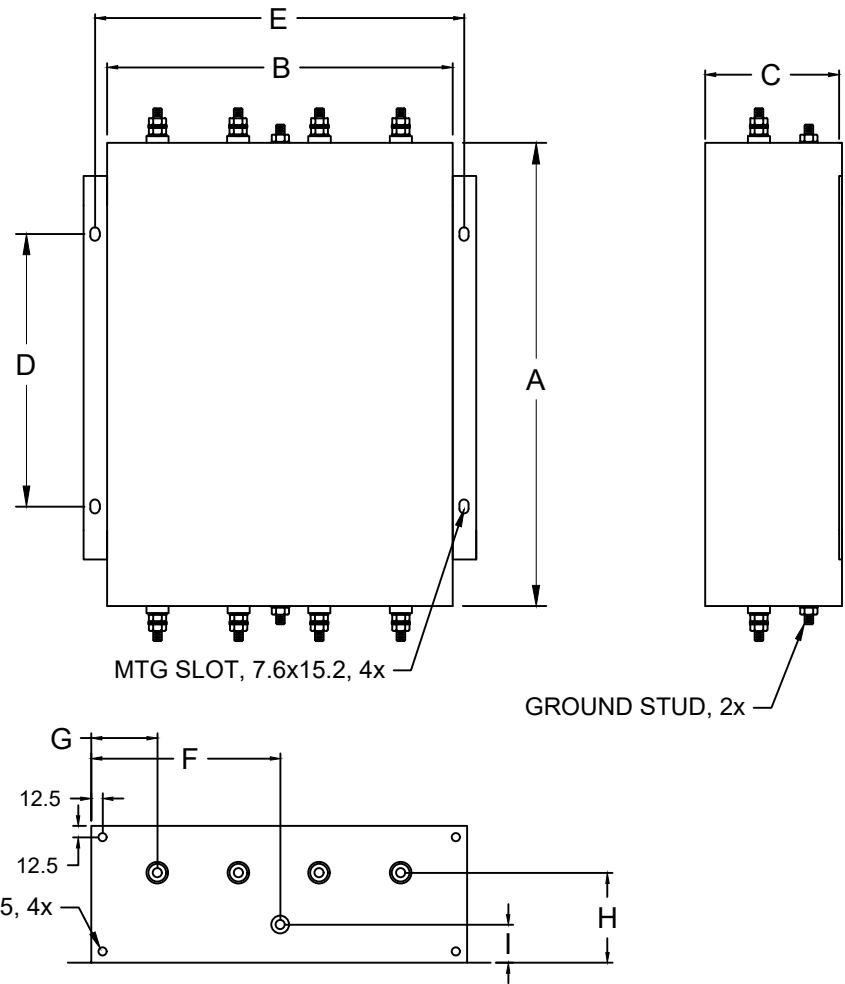

MODEL	AMPS	TERMINALS	DIMENSIONS, MM(IN)									WEIGHT LBS(KG)
			A	B	C	D	E	F	G	H	I	
PFMT4400S-10	10	M5	305 (12)	152.4 (6)	114 (4.5)	203.2 (8)	147 (5.8)	76.2 (3.0)	35 (1.38)	74 (2.9)	35 (1.38)	13(5.9)