


PFMT4400S-30
4-LINE + GND, 400HZ TEMPEST FILTER

SPECIFICATIONS

- MAX VOLTAGE: 0-277/0-480VAC
- MAX CURRENT: 30A/LINE
- FREQUENCY: 50/60/400HZ
- OPERATING TEMP.: -40 TO 70C
- HIPOT (L-G): 2200VDC
 (PRIOR TO ADDING DISCHARGE RESISTORS)
- DISCHARGE VOLT. (@277V): <30V IN 30S
- PERFORMANCE: >100dB (14KHZ TO 20GHZ)
- DESIGNED IN ACCORDANCE WITH THE
 FOLLOWING STANDARDS:
 - UL1283
 - MIL-STD-220
 - MIL-F-15733
 - LV DIRECTIVE

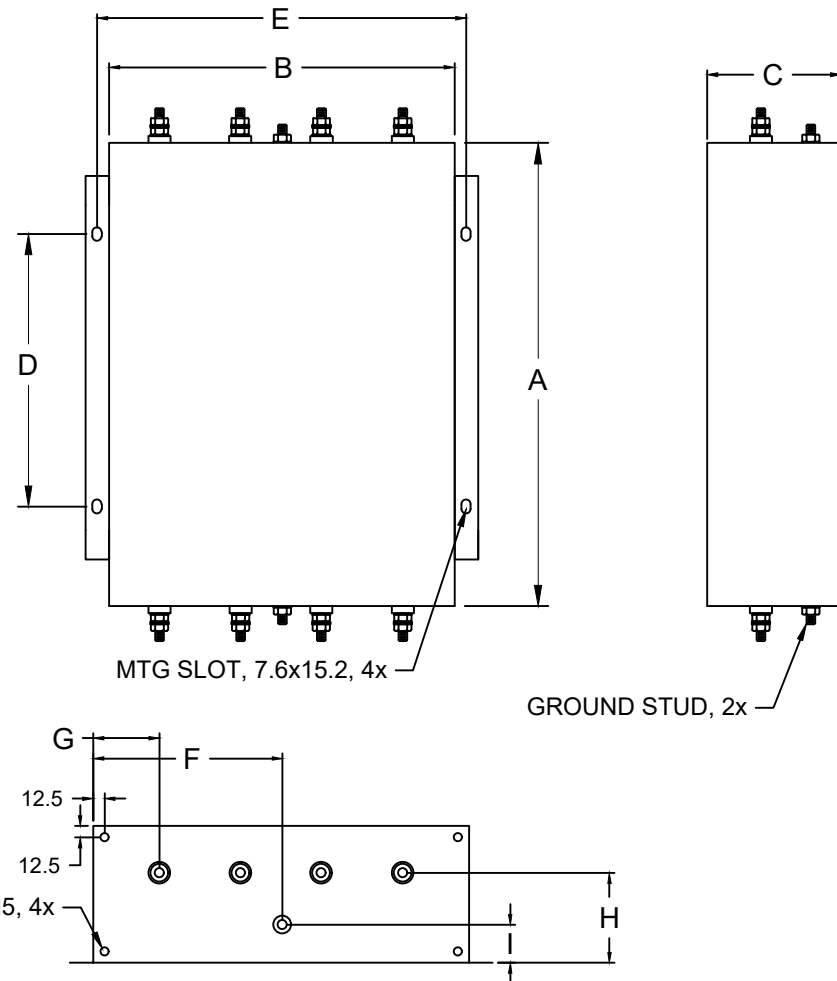

MODEL	AMPS	TERMINALS	DIMENSIONS, MM(IN)									WEIGHT LBS(KG)
			A	B	C	D	E	F	G	H	I	
PFMT4400S-30	30	M5	305 (12)	152.4 (6)	114 (4.5)	203.2 (8)	147 (5.8)	76.2 (3.0)	35 (1.38)	74 (2.9)	35 (1.38)	13(5.9)