


PFMT510S-100
2-LINE DC TEMPEST FILTER

SPECIFICATIONS

MAX VOLTAGE: 0-400VDC
 MAX CURRENT: 100A/LINE
 OPERATING TEMP.: -40 TO 70C
 HIPOT (L-G): 1500VDC
 (PRIOR TO ADDING DISCHARGE RESISTORS)
 DISCHARGE VOLT. (@400V): <30V IN 30S
 PERFORMANCE: >100dB (14KHZ TO 20GHZ)
 DESIGNED IN ACCORDANCE WITH THE
 FOLLOWING STANDARDS:
 UL1283
 MIL-STD-220
 MIL-F-15733
 LV DIRECTIVE

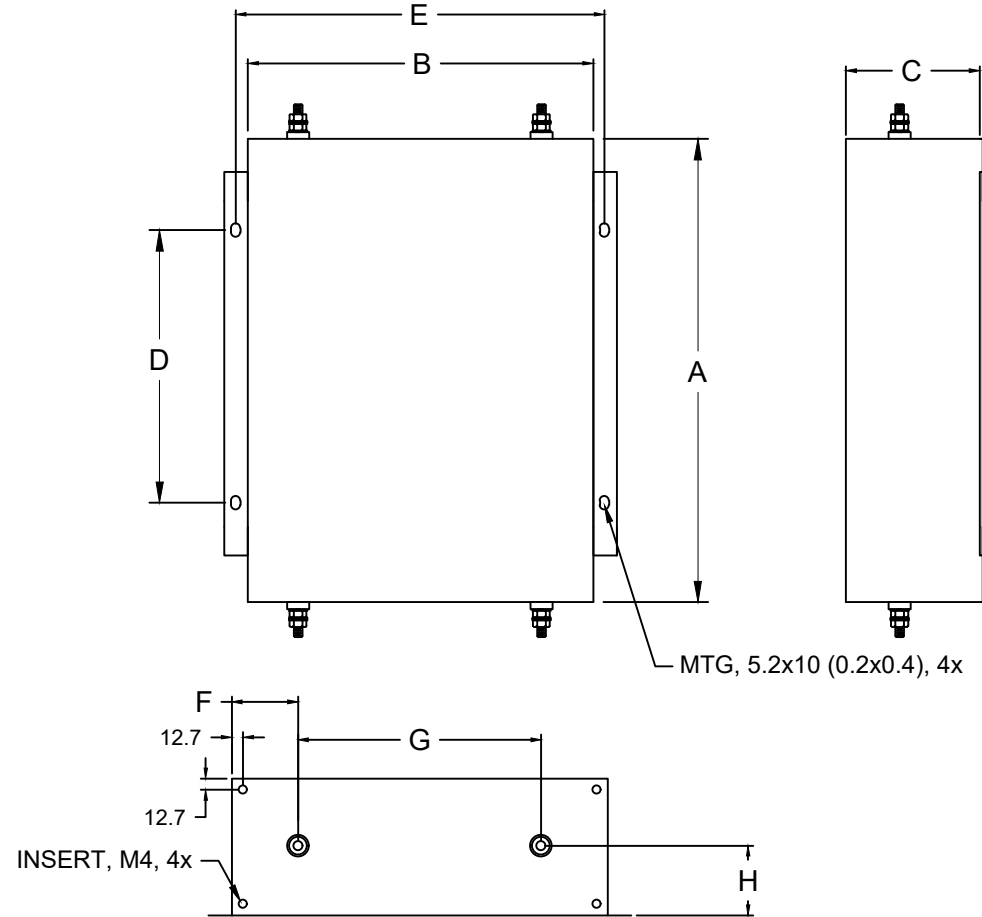

MODEL	AMPS	TERMINALS	DIMENSIONS (MM)								WEIGHT LBS(KG)
			A	B	C	D	E	F	G	H	
PFMT510S-100	100	M6	191	102	102	102	122	31.75	38	51	7.5(3.4)
			(7.5)	(4)	(4)	(4)	(4.8)	(1.25)	(1.5)	(2)	