


PFMT510S-150
2-LINE DC TEMPEST FILTER

SPECIFICATIONS

MAX VOLTAGE: 0-400VDC
 MAX CURRENT: 150A/LINE
 OPERATING TEMP.: -40 TO 70C
 HIPOT (L-G): 1500VDC
 (PRIOR TO ADDING DISCHARGE RESISTORS)
 DISCHARGE VOLT. (@400V): <30V IN 30S
 PERFORMANCE: >100dB (14KHZ TO 20GHZ)
 DESIGNED IN ACCORDANCE WITH THE
 FOLLOWING STANDARDS:
 UL1283
 MIL-STD-220
 MIL-F-15733
 LV DIRECTIVE

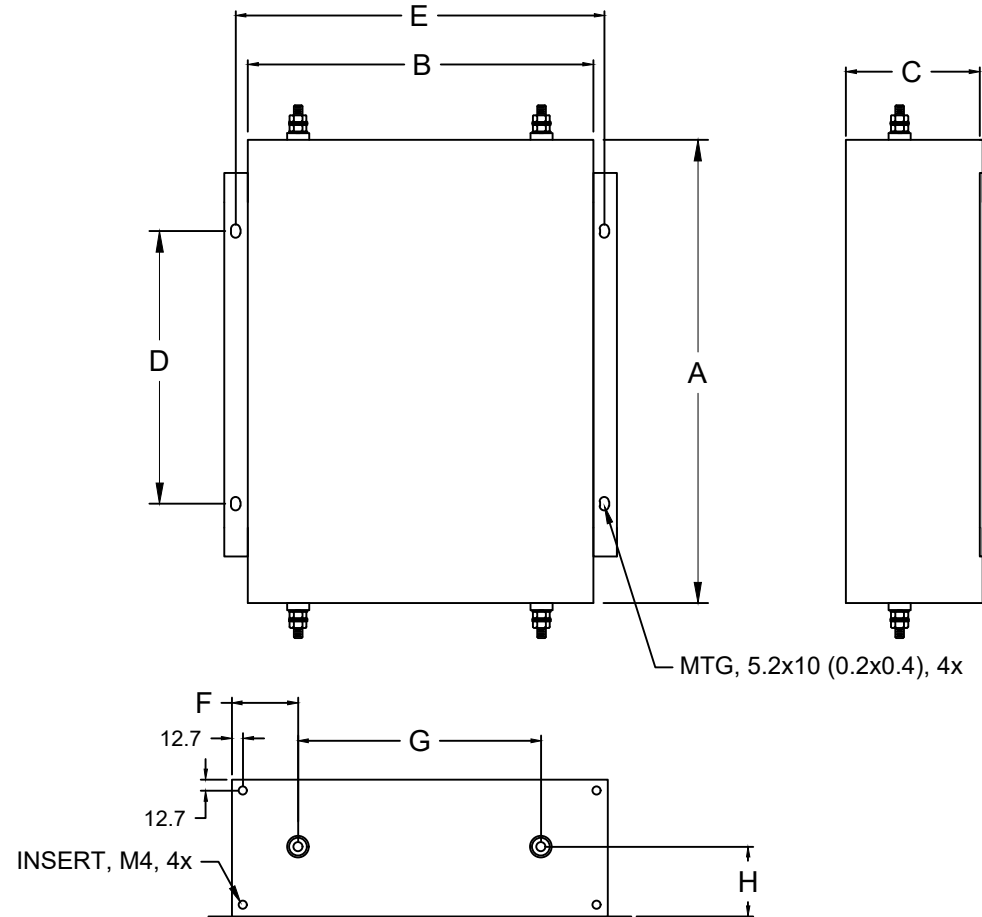

| MODEL | AMPS | TERMINALS | DIMENSIONS (MM) | | | | | | | | WEIGHT LBS(KG) |
|--------------|------|-----------|-----------------|-------|-------|-------|-------|--------|--------|--------|----------------|
| | | | A | B | C | D | E | F | G | H | |
| PFMT510S-150 | 150 | M10 | 305 | 165 | 140 | 205 | 185 | 40 | 85 | 70 | 18(8.2) |
| | | | (12) | (6.5) | (5.5) | (8.1) | (7.3) | (1.57) | (3.35) | (2.75) | |