


PFMT510S-200
2-LINE DC TEMPEST FILTER

SPECIFICATIONS

MAX VOLTAGE: 0-400VDC
 MAX CURRENT: 200A/LINE
 OPERATING TEMP.: -40 TO 70C
 HIPOT (L-G): 1500VDC
 (PRIOR TO ADDING DISCHARGE RESISTORS)
 DISCHARGE VOLT. (@400V): <30V IN 30S
 PERFORMANCE: >100dB (14KHZ TO 20GHZ)
 DESIGNED IN ACCORDANCE WITH THE
 FOLLOWING STANDARDS:
 UL1283
 MIL-STD-220
 MIL-F-15733
 LV DIRECTIVE

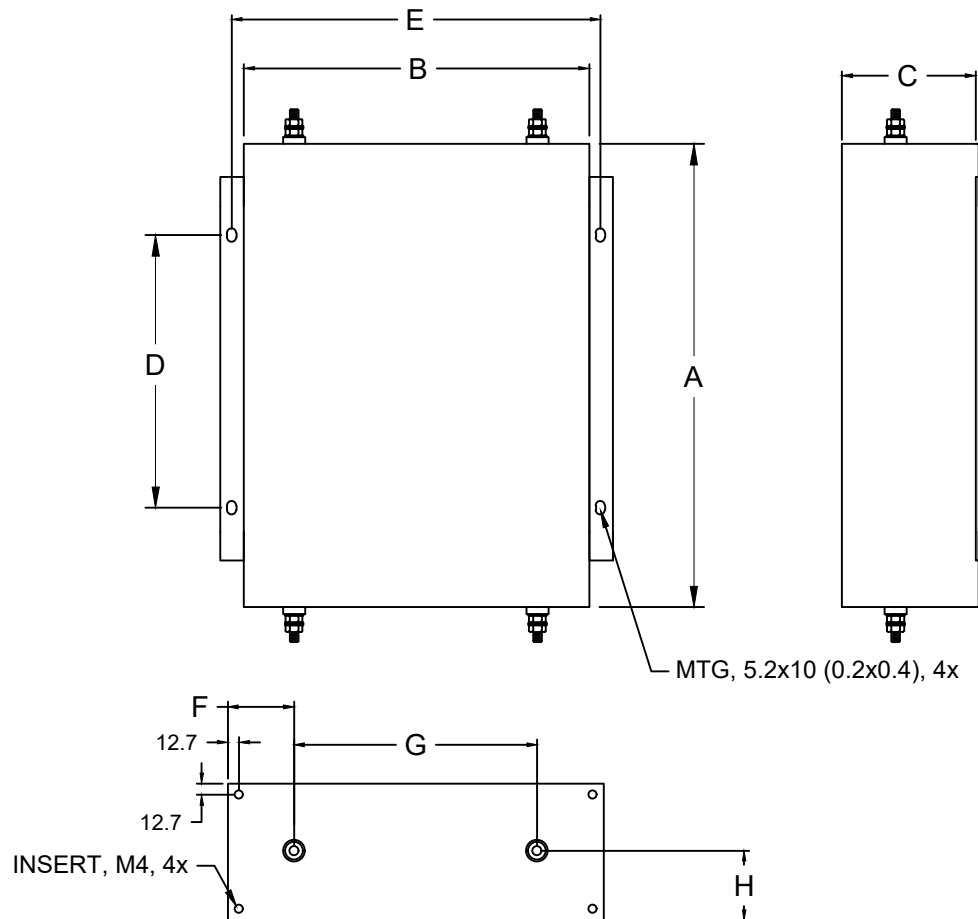

MODEL	AMPS	TERMINALS	DIMENSIONS (MM)								WEIGHT LBS(KG)
			A	B	C	D	E	F	G	H	
PFMT510S-200	200	M10	305	165	140	205	185	40	85	70	18(8.2)
			(12)	(6.5)	(5.5)	(8.1)	(7.3)	(1.57)	(3.35)	(2.75)	