


PFMT510S-60
2-LINE DC TEMPEST FILTER

SPECIFICATIONS

MAX VOLTAGE: 0-400VDC
 MAX CURRENT: 60A/LINE
 OPERATING TEMP.: -40 TO 70C
 HIPOT (L-G): 1500VDC
 (PRIOR TO ADDING DISCHARGE RESISTORS)
 DISCHARGE VOLT. (@400V): <30V IN 30S
 PERFORMANCE: >100dB (14KHZ TO 20GHZ)
 DESIGNED IN ACCORDANCE WITH THE
 FOLLOWING STANDARDS:
 UL1283
 MIL-STD-220
 MIL-F-15733
 LV DIRECTIVE

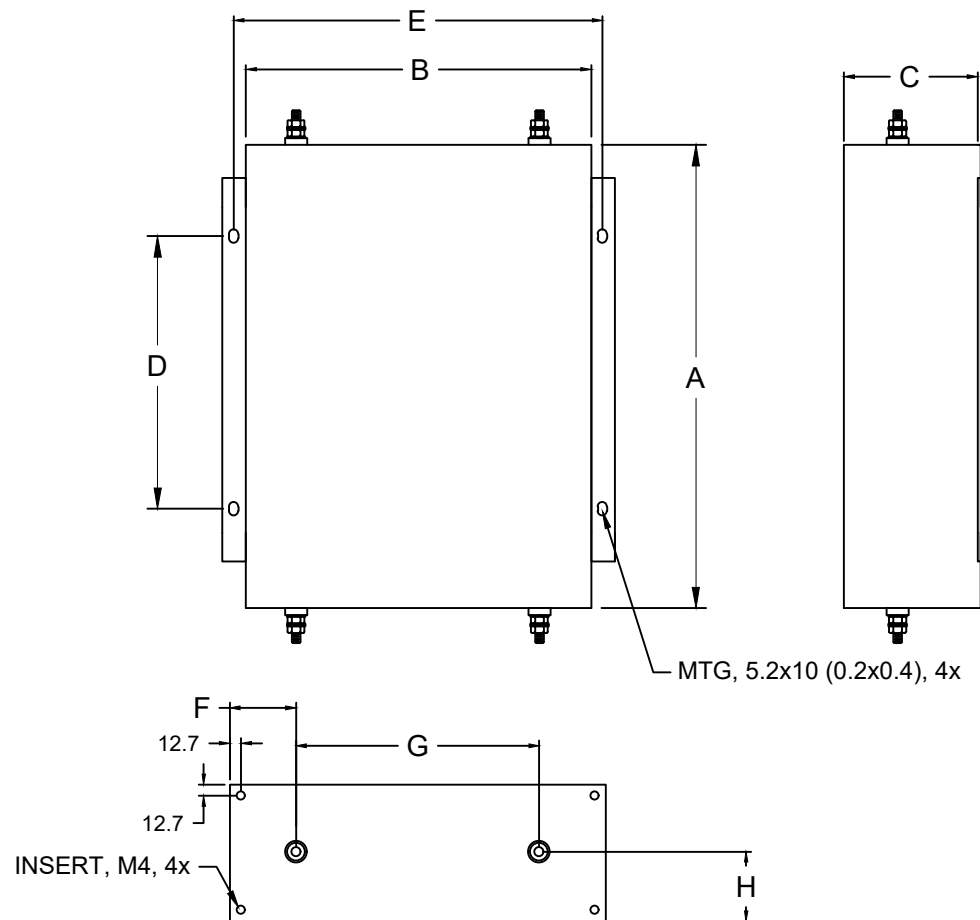

| MODEL | AMPS | TERMINALS | DIMENSIONS (MM) | | | | | | | | WEIGHT LBS(KG) |
|-------------|------|-----------|-----------------|-----|-----|-----|-------|--------|-------|-----|----------------|
| | | | A | B | C | D | E | F | G | H | |
| PFMT510S-60 | 60 | M5 | 191 | 102 | 102 | 102 | 122 | 31.75 | 38 | 51 | 7.0(3.2) |
| | | | (7.5) | (4) | (4) | (4) | (4.8) | (1.25) | (1.5) | (2) | |