
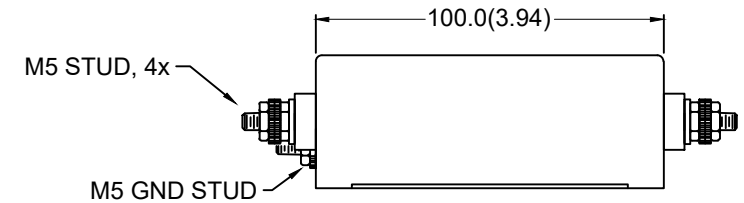
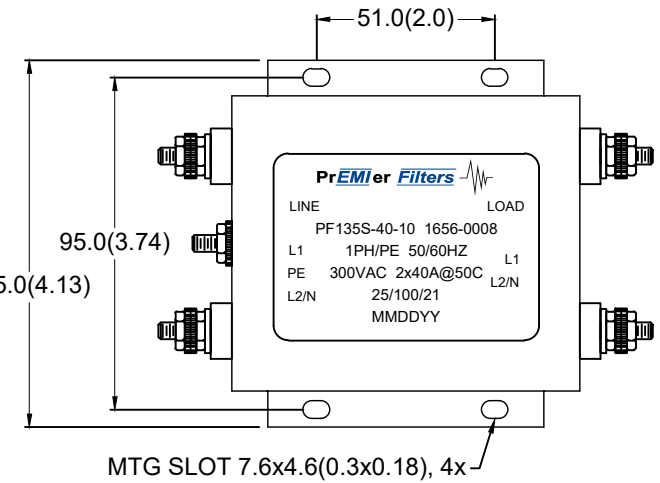


PF135S-40-10


## 1PH COMMERCIAL/INDUSTRIAL FILTER SINGLE STAGE / CHASSIS MOUNT

### SPECIFICATIONS

- MAX VOLTAGE: 0-300VAC
- MAX CURRENT: 40A/LINE
- USABLE FREQUENCY: 50/60/400HZ
- OPERATING TEMP.: -40 TO 50C
- LEAKAGE CURRENT (250V/60HZ): <1mA
- TYP. WEIGHT, LB(KG): 2.1(0.95)
- CLIMATIC CLASS: 25/100/21
- DESIGNED AND MANUFACTURED IN ACCORDANCE WITH THE FOLLOWING STANDARDS:
  - EN60939-3
  - CSA22.2 NO. 8
  - LV DIRECTIVE

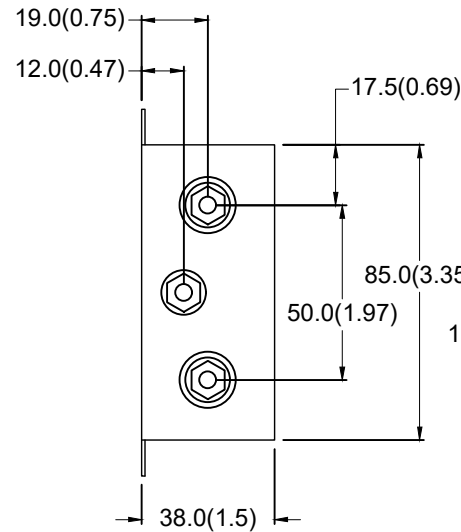

### SCHEMATIC

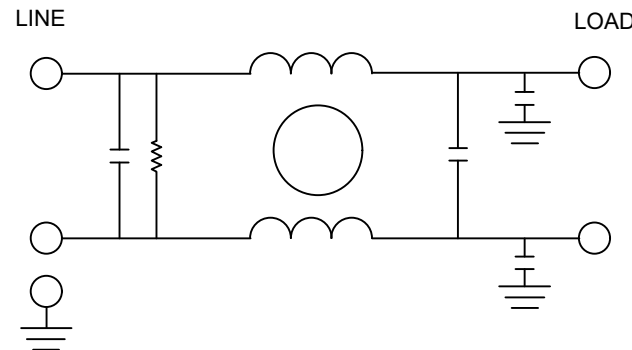

| TYPICAL INSERTION LOSS, 50/50 OHM |      |      |    |     |     |
|-----------------------------------|------|------|----|-----|-----|
| FREQ(HZ)                          | 150K | 500K | 1M | 10M | 30M |
| CM, dB                            | 46   | 60   | 65 | 62  | 56  |
| DM, dB                            | 52   | 60   | 70 | 62  | 60  |