

PF303S-60-100

3PH DELTA COMMERCIAL/INDUSTRIAL FILTER SINGLE STAGE / CHASSIS MOUNT

SPECIFICATIONS

MAX VOLTAGE: 0-520VAC

MAX CURRENT: 60A/LINE

USABLE FREQUENCY: 50/60/400HZ

OPERATING TEMP.: -40 TO 50C

LEAKAGE CURRENT (250V/60HZ): <1mA

TYP. WEIGHT, LB(KG): 2.7(1.3)

CLIMATIC CLASS: 25/100/21



DESIGNED AND MANUFACTURED IN ACCORDANCE

WITH THE FOLLOWING STANDARDS:


EN60939-3

CSA22.2 NO. 8

LV DIRECTIVE

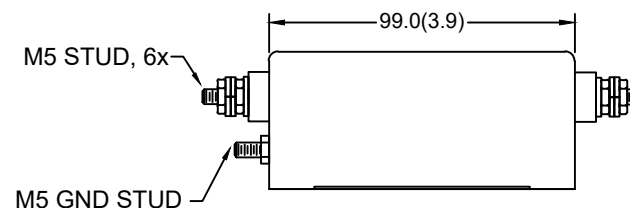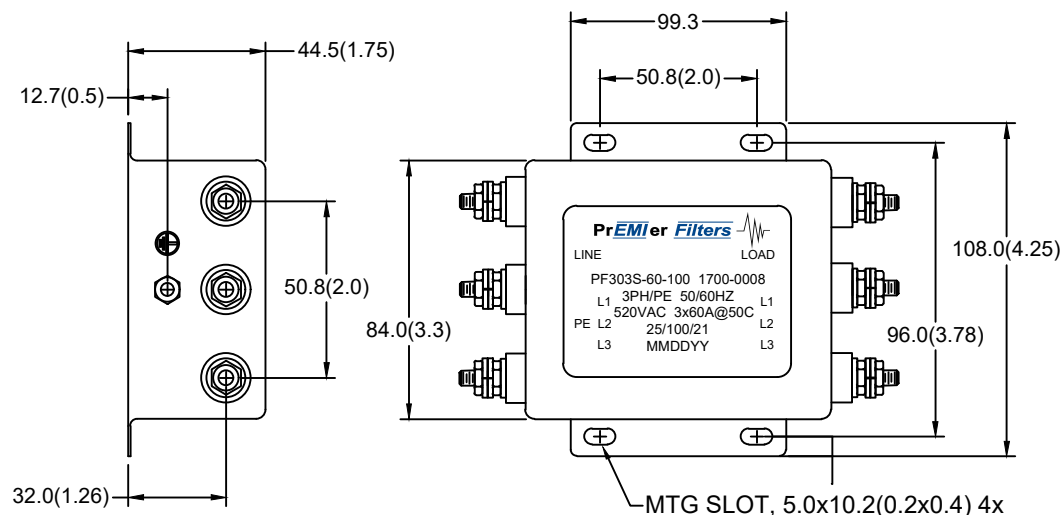

SCHEMATIC

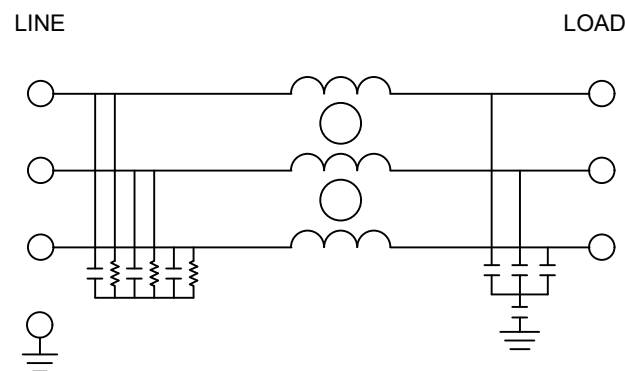

TYPICAL INSERTION LOSS, 50/50 OHM

FREQ(HZ)	150K	500K	1M	10M	30M
CM, dB	70	74	70	60	52
DM, dB	64	66	70	62	60