



PF407S-80-100

3PH WYE COMMERCIAL/INDUSTRIAL FILTER SINGLE STAGE / CHASSIS MOUNT


SPECIFICATIONS

- MAX VOLTAGE: 0-520VAC
- MAX CURRENT: 80A/LINE
- USABLE FREQUENCY: 50/60/400HZ
- OPERATING TEMP.: -40 TO 50C
- LEAKAGE CURRENT (250V/60HZ): <1mA
- TYP. WEIGHT, LB(KG): 8.0(3.6)
- CLIMATIC CLASS: 25/100/21
- DESIGNED AND MANUFACTURED IN ACCORDANCE
WITH THE FOLLOWING STANDARDS:

 - EN60939-3
 - CSA22.2 NO. 8
 - LV DIRECTIVE

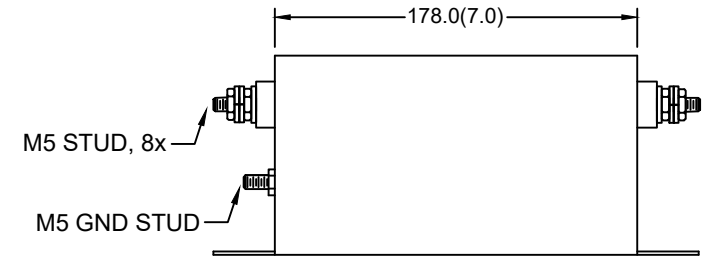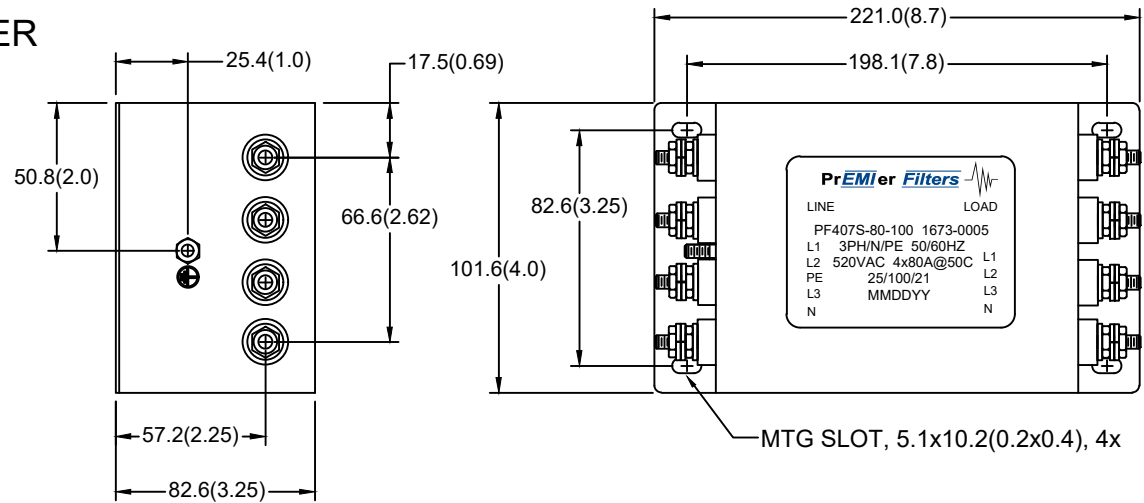

SCHEMATIC

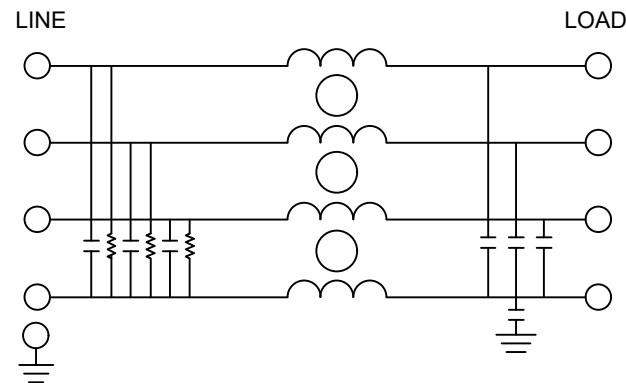

TYPICAL INSERTION LOSS, 50/50 OHM					
FREQ(HZ)	150K	500K	1M	10M	30M
CM, dB	60	70	72	58	52
DM, dB	50	68	72	70	66