



PFM105S-20-1000

DC MILITARY FILTER

(E.G. MIL-STD-461, DO-160, ETC.)

**SPECIFICATIONS**

MAX VOLTAGE: 0-500VDC

MAX CURRENT: 20A/LINE

OPERATING TEMP.: -40 TO 70C

HIPOT (L-G): 1800VDC

TYP. WEIGHT, LB(KG): 0.8(0.36)

MANUFACTURED IN ACCORDANCE WITH




THE FOLLOWING STANDARDS:

UL1283

MIL-STD-220

MIL-F-15733

LV DIRECTIVE

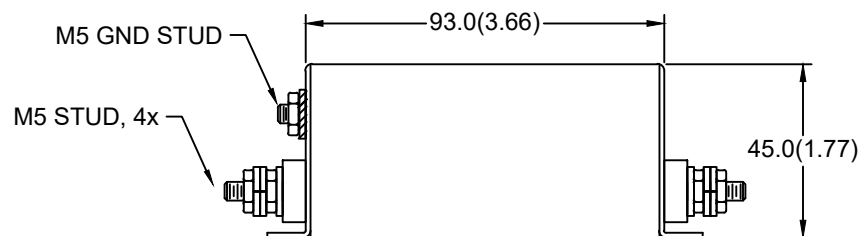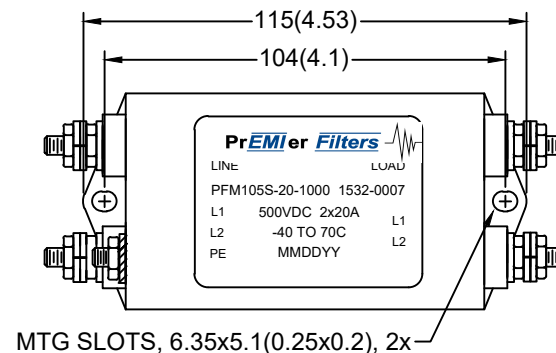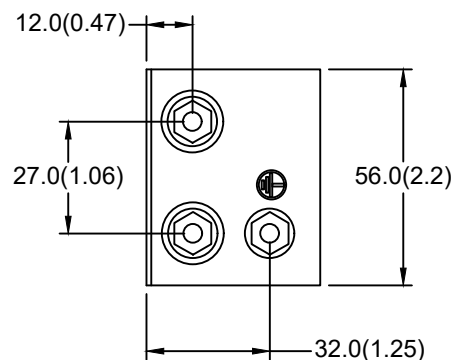

TYPICAL INSERTION LOSS, 50/50 OHM					
FREQ(HZ)	10K	100K	500K	1M	10M
CM,dB	17	33	51	50	46
DM, dB	25	44	60	60	42

SPECIFICATIONS SUBJECT TO CHANGE