



PFM400S-80-100


3PH WYE MILITARY FILTER  
(E.G. MIL-STD-461, DO-160, ETC.)

**SPECIFICATIONS**


- MAX VOLTAGE: 0-520VAC
- MAX CURRENT: 80A/LINE
- FREQUENCY: 50/60/400HZ
- OPERATING TEMP.: -40 TO 70C
- HIPOT (L-G): 1800VDC
- LEAKAGE CURRENT(250V/60HZ): <3.5mA
- TYP. WEIGHT, LB(KG): 10(4.5)
- MANUFACTURED IN ACCORDANCE WITH

**THE FOLLOWING STANDARDS:**

- UL1283
- MIL-STD-220
- MIL-F-15733
- LV DIRECTIVE

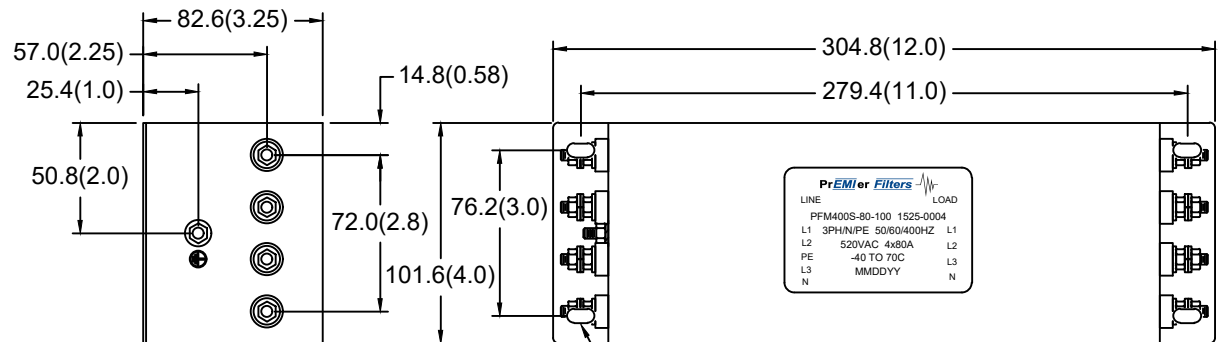

MTG SLOTS, 6.35x12.70.25x0.5), 4X

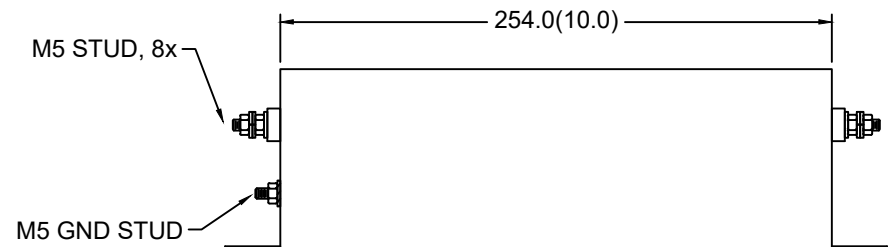

| TYPICAL INSERTION LOSS, 50/50 OHM |     |      |      |    |     |
|-----------------------------------|-----|------|------|----|-----|
| FREQ(HZ)                          | 10K | 100K | 500K | 1M | 10M |
| CM,dB                             | 20  | 32   | 55   | 58 | 42  |
| DM, dB                            | 26  | 44   | 60   | 60 | 40  |