



PFM70S-30-10

1PH MILITARY FILTER

(E.G. MIL-STD-461, DO-160, ETC.)

**SPECIFICATIONS**

MAX VOLTAGE: 0-300VAC

MAX CURRENT: 30A/LINE

FREQUENCY: 50/60/400HZ

OPERATING TEMP.: -40 TO 70C

HI POT (L-G): 1800VDC

LEAKAGE CURRENT(@250V/60HZ): <1.0mA

TYP. WEIGHT, LB(KG): 1.8(0.82)

MANUFACTURED IN ACCORDANCE WITH


THE FOLLOWING STANDARDS:

UL1283

MIL-STD-220

MIL-F-15733

LV DIRECTIVE

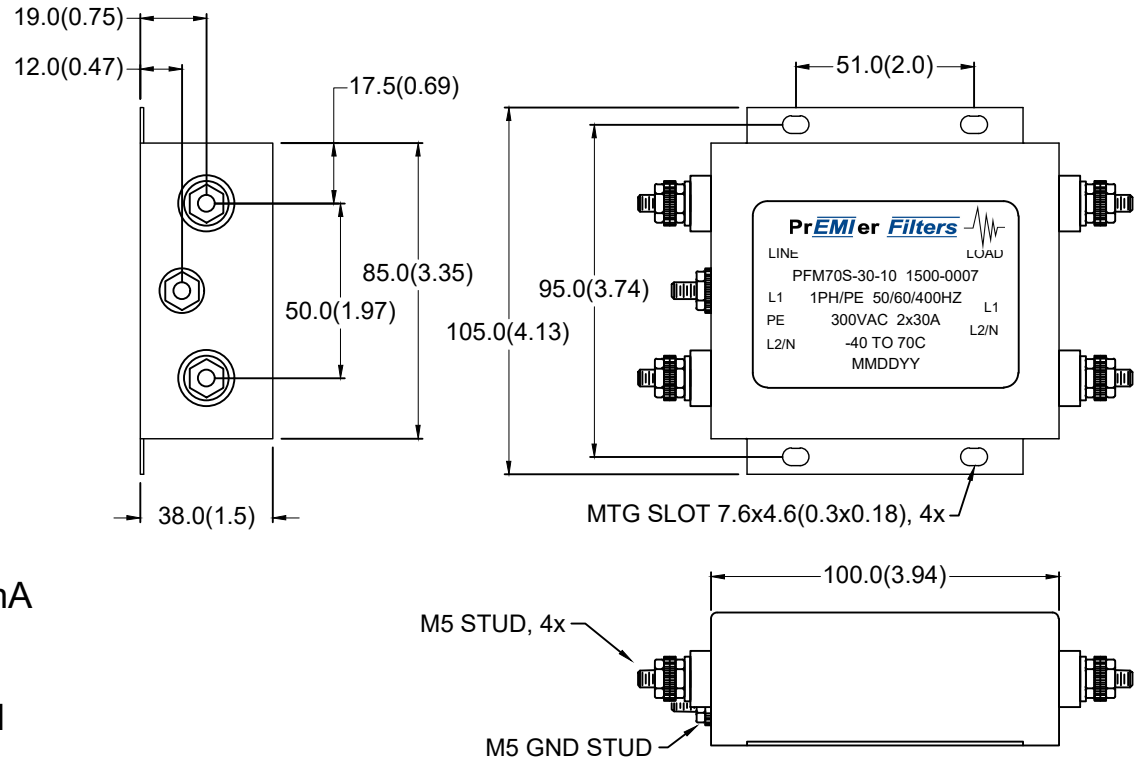

PrEMI er Filters  
 LINE L1 L2/N  
 PFM70S-30-10 1500-0007  
 L1 1PH/PE 50/60/400HZ L1  
 PE 300VAC 2x30A L2/N  
 L2/N -40 TO 70C  
 MMDDYY

TYPICAL INSERTION LOSS, 50/50 OHM					
FREQ(HZ)	10K	100K	500K	1M	10M
CM,dB	17	32	51	50	46
DM, dB	24	44	62	60	47