

## PFMT255S-300

### 2-LINE + GND TEMPEST FILTER INPUT/OUTPUT EMI COMPARTMENTS

#### SPECIFICATIONS

MAX VOLTAGE: 0-277/0-480VAC

MAX CURRENT: 300A/LINE

FREQUENCY: 50/60HZ

OPERATING TEMP.: -40 TO 70C

HIPOT (L-G): 2200VDC

(PRIOR TO INSTALLING DISCHARGE RESISTORS)

DISCHARGE VOLT. (@277V): <30V IN 30S

GROUND STUD PROVIDED IN INPUT & OUTPUT ACCESS AREAS

PERFORMANCE: >100dB (10KHZ TO 40GHZ)

MANUFACTURED IN ACCORDANCE WITH


THE FOLLOWING STANDARDS:

UL1283

MIL-STD-220

MIL-F-15733

LV DIRECTIVE

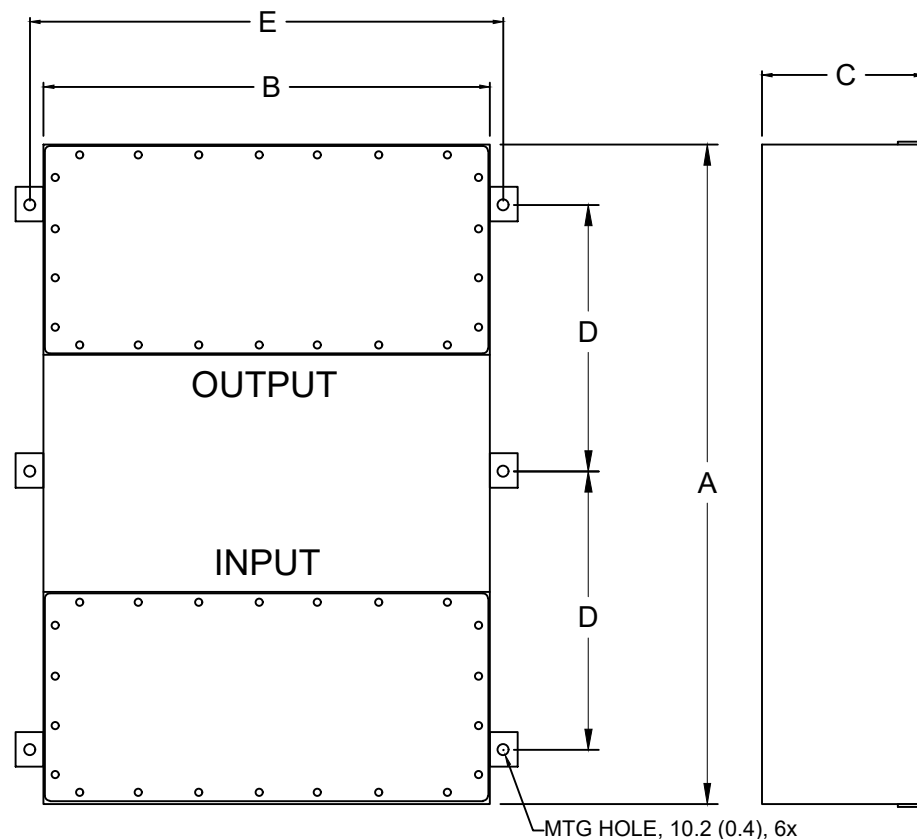

MODEL	AMPS	TERMINALS	DIMENSIONS - MM (IN)					WEIGHT LBS(KG)
			A	B	C	D	E	
PFMT255S-300	300	M16	1320	406	305	584	457	270(122.7)
			(52)	(16)	(12)	(23)	(18)	