

PFMT333S-100
3-LINE + GND TEMPEST FILTER
100dB@10KHZ

SPECIFICATIONS


MAX VOLTAGE: 0-277/0-480VAC
 MAX CURRENT: 100A/LINE
 FREQUENCY: 50/60HZ
 OPERATING TEMP.: -40 TO 70C
 HIPOT (L-G): 2200VDC
 (PRIOR TO ADDING DISCHARGE RESISTORS)
 DISCHARGE VOLT. (@277V): <30V IN 30S
 OVERLOAD: 140% RATED CURRENT FOR 15 MINUTES
 PERFORMANCE: >100dB (10KHZ TO 20GHZ)
 DESIGNED IN ACCORDANCE WITH THE
 FOLLOWING STANDARDS:

MIL-STD-220
 MIL-F-15733
 MIL-STD-810
 LV DIRECTIVE



5025116

CONFORMS TO
 UL STD 1283

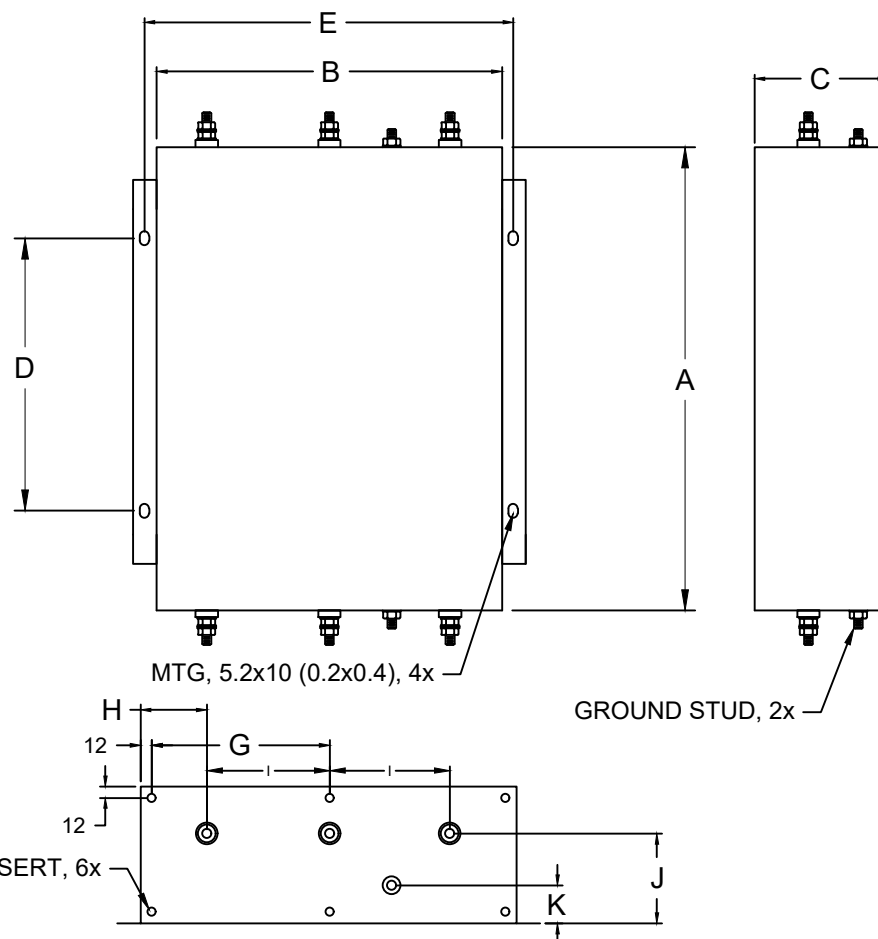

MODEL	AMPS	TERMINALS	DIMENSIONS - MM (IN)										WEIGHT LBS(KG)
			A	B	C	D	E	G	H	I	J	K	
PFMT333S-100	100	M6	280	165	127	230	185	70.5	37	45.5	80	42	24(10.9)
			(11)	(6.5)	(5)	(9)	(7.3)	(2.8)	(1.45)	(1.8)	(3.1)	(1.7)	