

**PFMT333S-400**  
**3-LINE + GND TEMPEST FILTER**  
**100dB@10KHZ**


**SPECIFICATIONS**

MAX VOLTAGE: 0-277/0-480VAC  
 MAX CURRENT: 400A/LINE  
 FREQUENCY: 50/60HZ  
 OPERATING TEMP.: -40 TO 70C  
 HIPOT (L-G): 2200VDC  
 (PRIOR TO ADDING DISCHARGE RESISTORS)  
 DISCHARGE VOLT. (@277V): <30V IN 30S  
 OVERLOAD: 140% RATED CURRENT FOR 15 MINUTES  
 PERFORMANCE: >100dB (10KHZ TO 20GHZ)  
 DESIGNED IN ACCORDANCE WITH THE  
 FOLLOWING STANDARDS:

MIL-STD-220  
 MIL-F-15733  
 MIL-STD-810  
 LV DIRECTIVE



CONFORMS TO  
 UL STD 1283

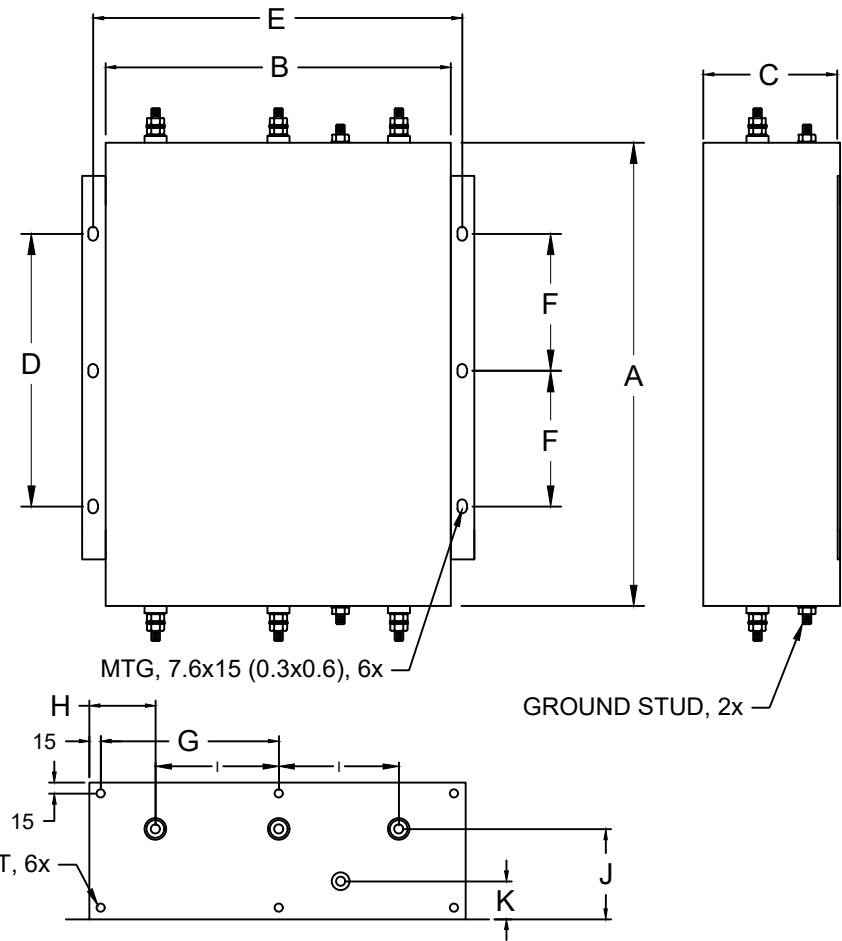

MODEL	AMPS	TERMINALS	DIMENSIONS - MM (IN)											WEIGHT LBS(KG)
			A	B	C	D	E	F	G	H	I	J	K	
PFMT333S-400	400	M16	711	280	178	610	300	305	128	60	80	105	50	132(60)
			(28)	(11)	(7)	(24)	(11.8)	(12)	(5)	(2.4)	(3.1)	(4.1)	(2)	