

PFMT333S-600
3-LINE + GND TEMPEST FILTER
100dB@10KHZ

SPECIFICATIONS


MAX VOLTAGE: 0-277/0-480VAC
 MAX CURRENT: 600A/LINE
 FREQUENCY: 50/60HZ
 OPERATING TEMP.: -40 TO 70C
 HIPOT (L-G): 2200VDC
 (PRIOR TO ADDING DISCHARGE RESISTORS)
 DISCHARGE VOLT. (@277V): <30V IN 30S
 OVERLOAD: 140% RATED CURRENT FOR 15 MINUTES
 PERFORMANCE: >100dB (10KHZ TO 20GHZ)
 DESIGNED IN ACCORDANCE WITH THE
 FOLLOWING STANDARDS:

MIL-STD-220
 MIL-F-15733
 MIL-STD-810
 LV DIRECTIVE



5025116

CONFORMS TO
 UL STD 1283

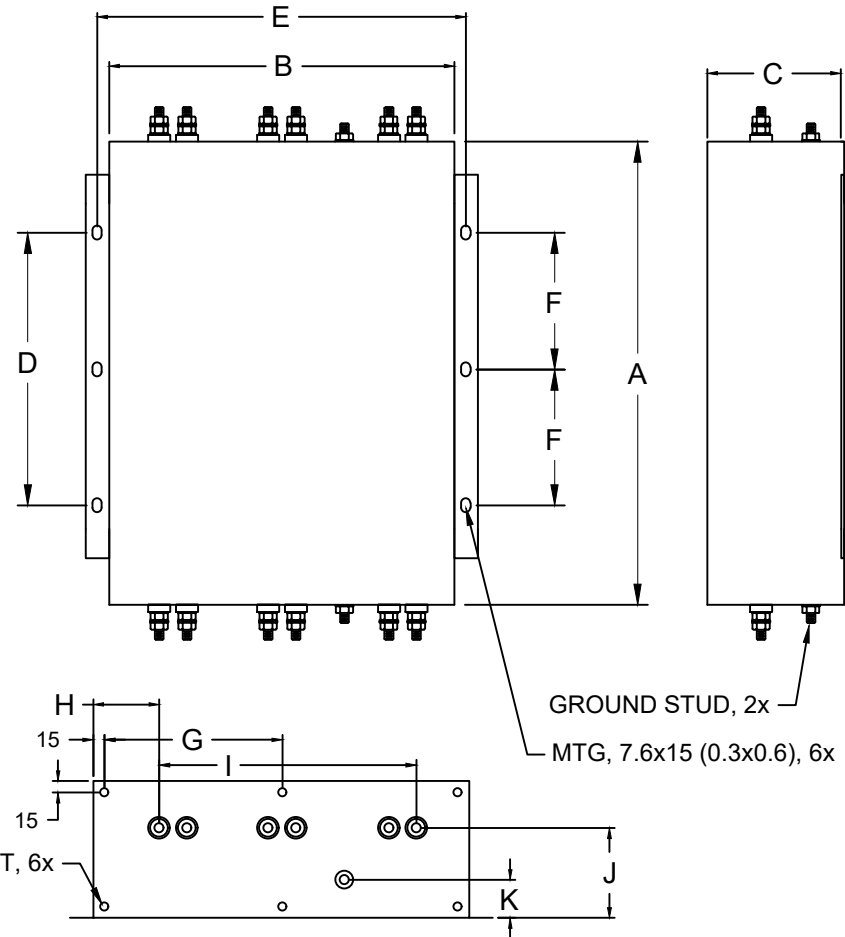

MODEL	AMPS	TERMINALS	DIMENSIONS - MM (IN)											WEIGHT LBS(KG)
			A	B	C	D	E	F	G	H	I	J	K	
PFMT333S-600	600	2xM16	965	508	203	864	547	432	239	63.5	381	130	55	325(147.7)
			(38)	(20)	(8)	(34)	(21.5)	(17)	(9.4)	(2.5)	(15)	(5.1)	(2.2)	