


PFMT444S-100
4-LINE + GND TEMPEST FILTER
100dB@10KHZ

SPECIFICATIONS

- MAX VOLTAGE: 0-277/0-480VAC
- MAX CURRENT: 100A/LINE
- FREQUENCY: 50/60HZ
- OPERATING TEMP.: -40 TO 70C
- HIPOT (L-G): 2200VDC
(PRIOR TO ADDING DISCHARGE RESISTORS)
- DISCHARGE VOLT. (@277V): <30V IN 30S
- PERFORMANCE: >100dB (10KHZ TO 20GHZ)
- DESIGNED IN ACCORDANCE WITH THE FOLLOWING STANDARDS:
 - UL1283
 - MIL-STD-220
 - MIL-F-15733
 - LV DIRECTIVE

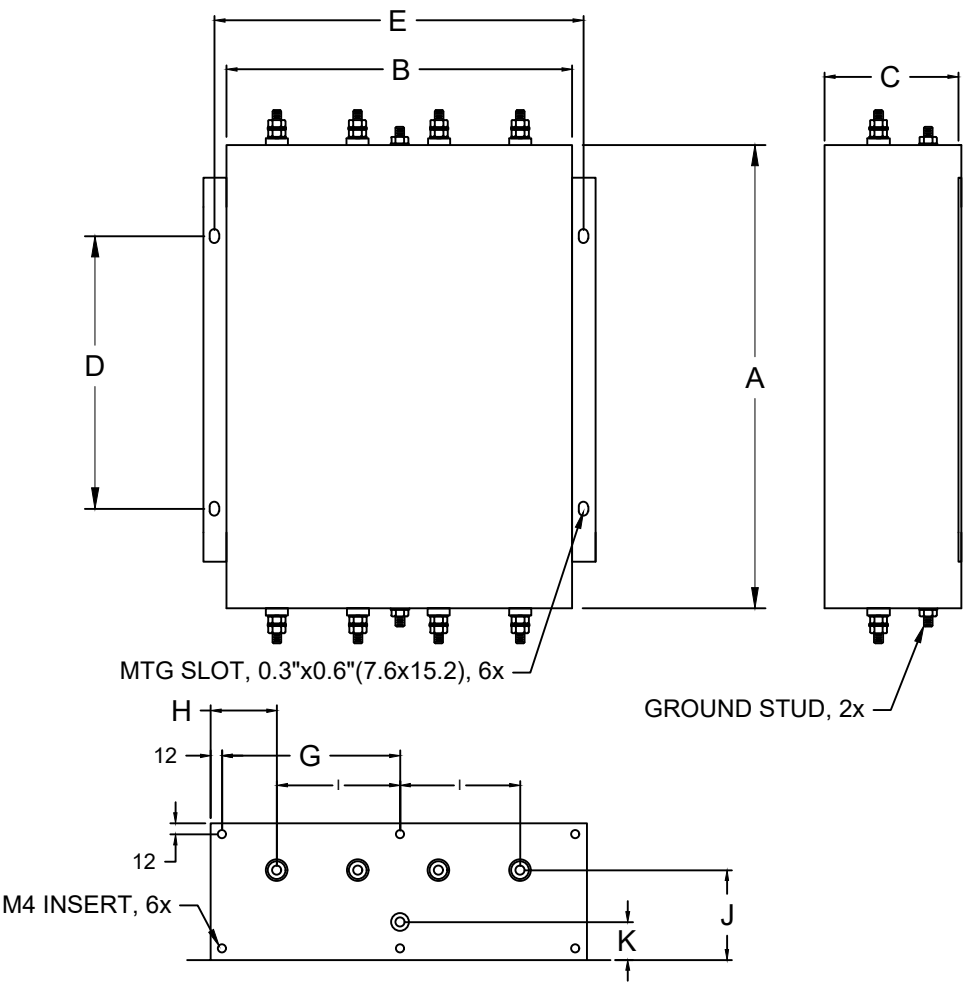

MODEL	AMPS	TERMINALS	DIMENSIONS - MM (IN)											WEIGHT LBS(KG)
			A	B	C	D	E	G	H	I	J	K		
PFMT444S-100	100	M6	305	178	152	265	198	77	34	55	95	46	35(15.9)	
			(12)	(7)	(6)	(10.4)	(7.8)	(3)	(1.3)	(2.2)	(3.7)	(1.8)		