




PFMT444S-16  
4-LINE + GND TEMPEST FILTER  
100dB@10KHZ

SPECIFICATIONS

MAX VOLTAGE: 0-277/0-480VAC  
MAX CURRENT: 16A/LINE  
FREQUENCY: 50/60HZ  
OPERATING TEMP.: -40 TO 70C  
HIPOT (L-G): 2200VDC  
(PRIOR TO ADDING DISCHARGE RESISTORS)  
DISCHARGE VOLT. (@277V): <30V IN 30S  
PERFORMANCE: >100dB (10KHZ TO 20GHZ)  
DESIGNED IN ACCORDANCE WITH THE  
FOLLOWING STANDARDS:  
UL1283  
MIL-STD-220  
MIL-F-15733  
LV DIRECTIVE

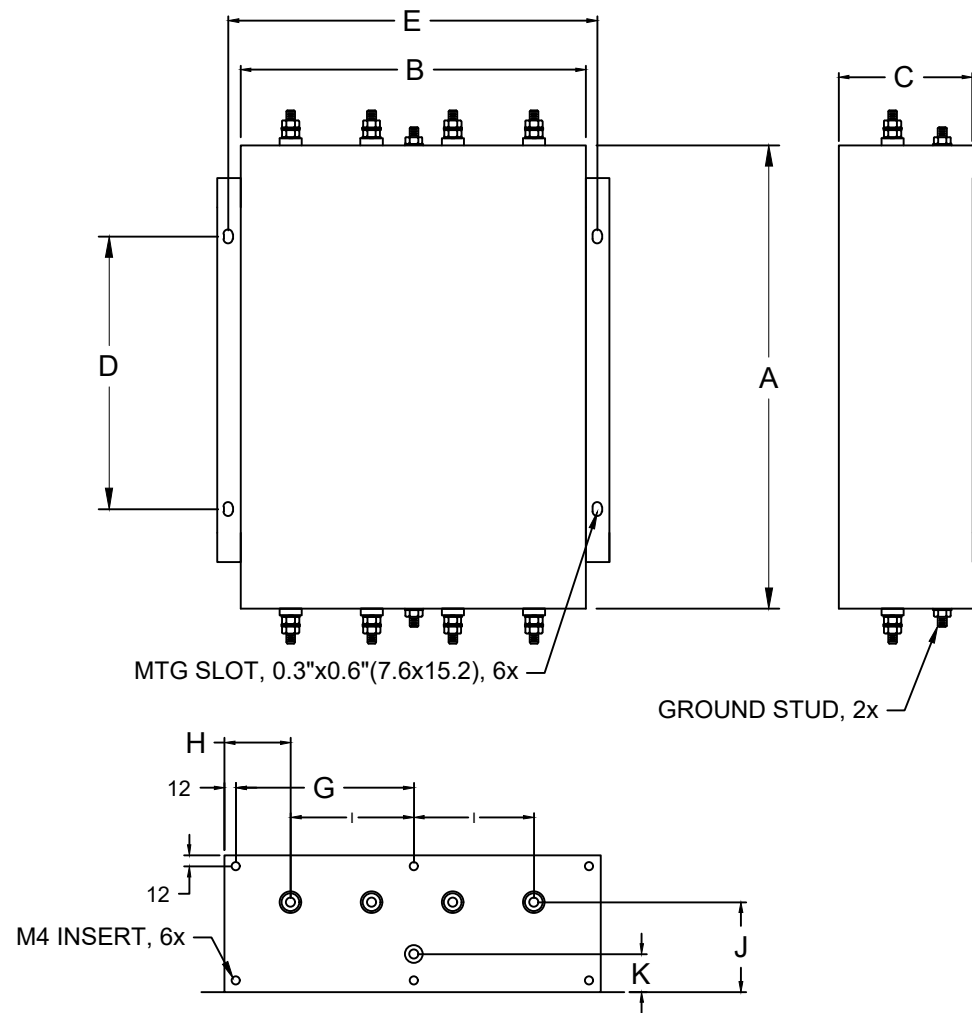

MODEL	AMPS	TERMINALS	DIMENSIONS - MM (IN)										WEIGHT LBS(KG)
			A	B	C	D	E	G	H	I	J	K	
PFMT444S-16	16	M5	178	146	102	138	166	61	30	42	60	34	12(5.5)
			(7)	(5.7)	(4)	(5.4)	(6.5)	(2.4)	(1.2)	(1.7)	(2.4)	(1.3)	