

PFMT444S-200
4-LINE + GND TEMPEST FILTER
100dB@10KHZ


SPECIFICATIONS

MAX VOLTAGE: 0-277/0-480VAC
 MAX CURRENT: 200A/LINE
 FREQUENCY: 50/60HZ
 OPERATING TEMP.: -40 TO 70C
 HIPOT (L-G): 2200VDC
 (PRIOR TO ADDING DISCHARGE RESISTORS)
 DISCHARGE VOLT. (@277V): <30V IN 30S
 OVERLOAD: 140% RATED CURRENT FOR 15 MINUTES
 PERFORMANCE: >100dB (10KHZ TO 20GHZ)
 DESIGNED IN ACCORDANCE WITH THE
 FOLLOWING STANDARDS:

MIL-STD-220
 MIL-F-15733
 MIL-STD-810
 LV DIRECTIVE



CONFORMS TO
 UL STD 1283

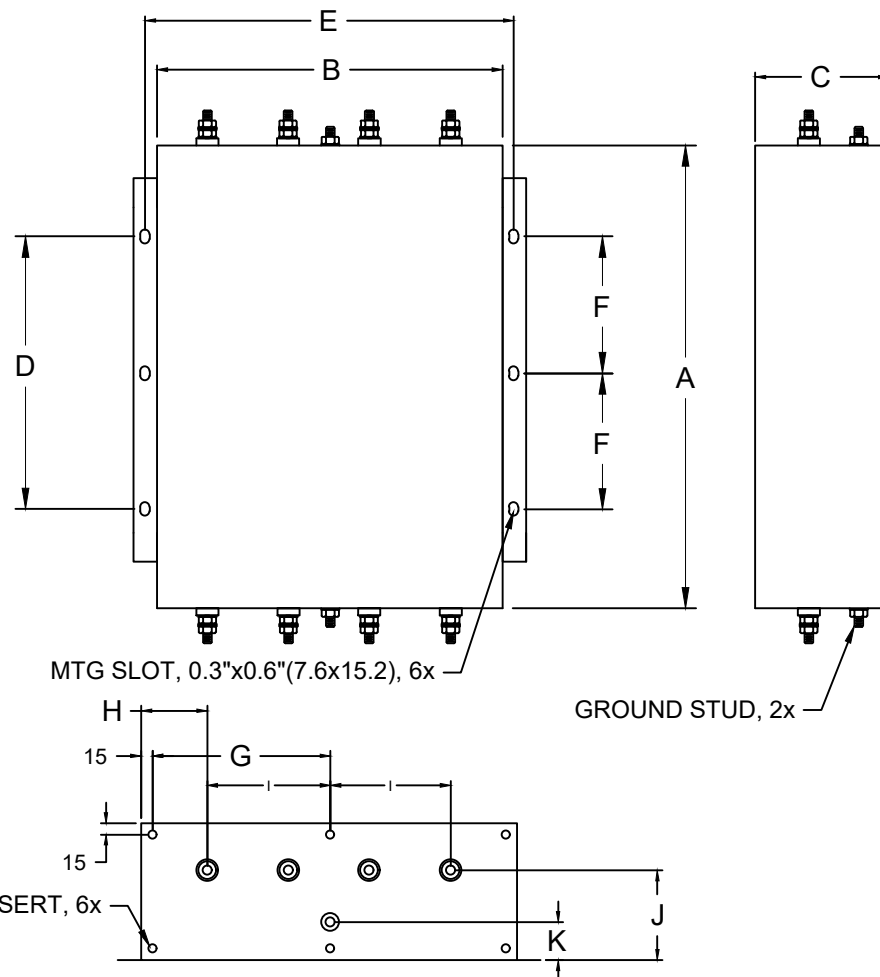

MODEL	AMPS	TERMINALS	DIMENSIONS - MM (IN)											WEIGHT LBS(KG)
			A	B	C	D	E	F	G	H	I	J	K	
PFMT444S-200	200	M10	558	305	165	458	330	229	140.5	55	97.5	95	46	96(43.6)
			(22)	(12)	(6.5)	(18)	(13)	(9)	(5.5)	(2.2)	(3.8)	(3.7)	(1.8)	