

**PFMT444S-500**  
**4-LINE + GND TEMPEST FILTER**  
**100dB@10KHZ**


**SPECIFICATIONS**

MAX VOLTAGE: 0-277/0-480VAC  
 MAX CURRENT: 500A/LINE  
 FREQUENCY: 50/60HZ  
 OPERATING TEMP.: -40 TO 70C  
 HIPOT (L-G): 2200VDC  
 (PRIOR TO ADDING DISCHARGE RESISTORS)  
 DISCHARGE VOLT. (@277V): <30V IN 30S  
 OVERLOAD: 140% RATED CURRENT FOR 15 MINUTES  
 PERFORMANCE: >100dB (10KHZ TO 20GHZ)  
 DESIGNED IN ACCORDANCE WITH THE  
 FOLLOWING STANDARDS:

MIL-STD-220  
 MIL-F-15733  
 MIL-STD-810  
 LV DIRECTIVE



CONFORMS TO  
 UL STD 1283

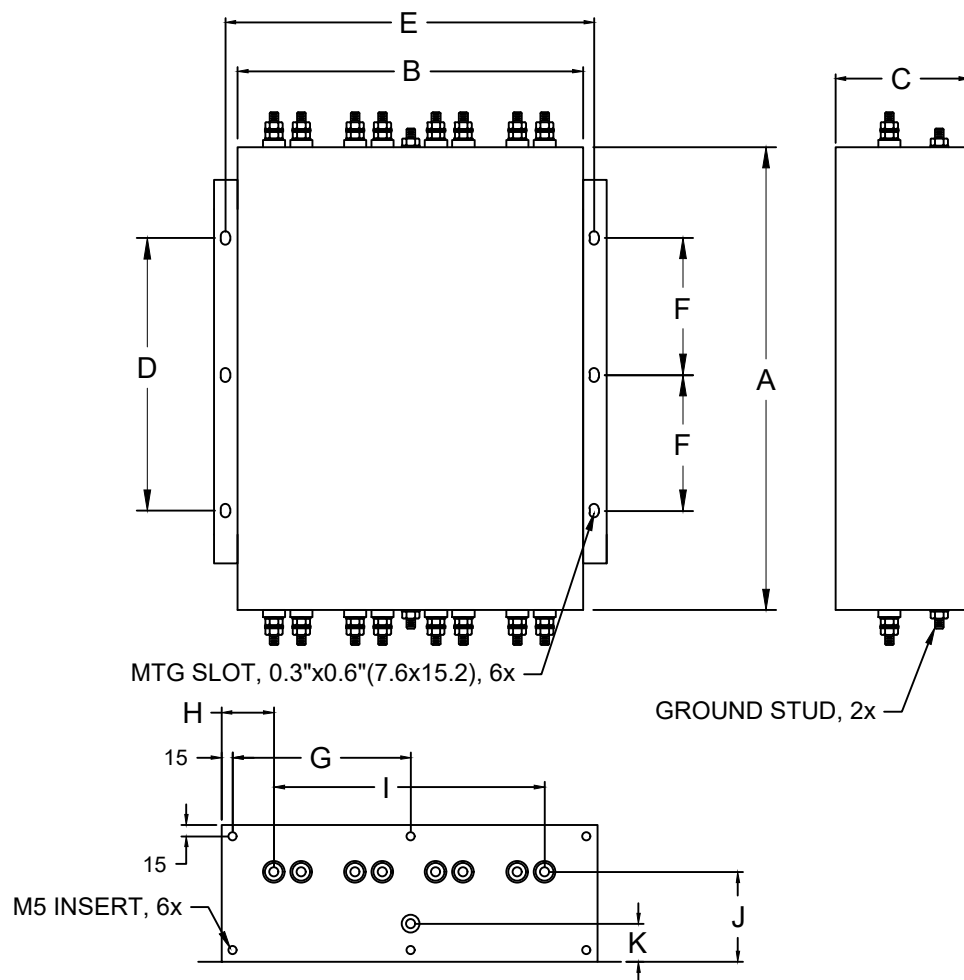

MODEL	AMPS	TERMINALS	DIMENSIONS - MM (IN)											WEIGHT LBS(KG)
			A	B	C	D	E	F	G	H	I	J	K	
PFMT444S-500	500	2xM16	965	660	203	662	698	330	315	63.5	533	130	55	435(197.7)
			(30)	(26)	(8)	(26)	(27.5)	(13)	(12.4)	(2.5)	(21)	(5.1)	(2.2)	