

PFMT444S-600
4-LINE + GND TEMPEST FILTER
100dB@10KHZ


SPECIFICATIONS

MAX VOLTAGE: 0-277/0-480VAC
 MAX CURRENT: 600A/LINE
 FREQUENCY: 50/60HZ
 OPERATING TEMP.: -40 TO 70C
 HIPOT (L-G): 2200VDC
 (PRIOR TO ADDING DISCHARGE RESISTORS)
 DISCHARGE VOLT. (@277V): <30V IN 30S
 OVERLOAD: 140% RATED CURRENT FOR 15 MINUTES
 PERFORMANCE: >100dB (10KHZ TO 20GHZ)
 DESIGNED IN ACCORDANCE WITH THE
 FOLLOWING STANDARDS:

MIL-STD-220
 MIL-F-15733
 MIL-STD-810
 LV DIRECTIVE



CONFORMS TO
 UL STD 1283

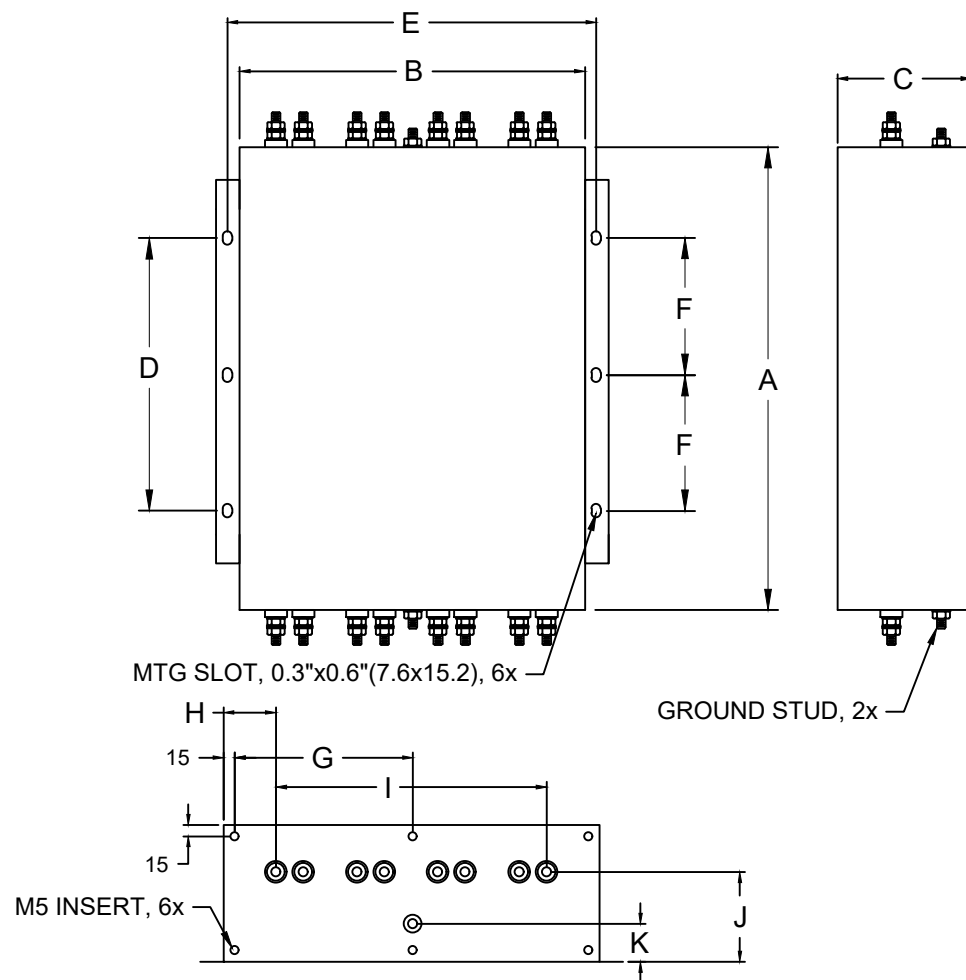

| MODEL | AMPS | TERMINALS | DIMENSIONS - MM (IN) | | | | | | | | | | | WEIGHT LBS(KG) |
|--------------|------|-----------|----------------------|------|-----|------|--------|------|--------|-------|------|-------|-------|----------------|
| | | | A | B | C | D | E | F | G | H | I | J | K | |
| PFMT444S-600 | 600 | 2xM16 | 965 | 660 | 203 | 662 | 698 | 330 | 315 | 63.5 | 533 | 130 | 55 | 435(197.7) |
| | | | (30) | (26) | (8) | (26) | (27.5) | (13) | (12.4) | (2.5) | (21) | (5.1) | (2.2) | |