



**PFMF370-1200-2**  
**2-LINE + GND SCIF/FACILITY FILTER**

**SPECIFICATIONS**

MAX VOLTAGE: 0-277/0-480VAC

MAX CURRENT: 1200A/LINE

FREQUENCY: 50/60HZ

OPERATING TEMP.: -40 TO 65C

HIPOT (L-G): 2200VDC

(PRIOR TO INSTALLING DISCHARGE RESISTORS)

DISCHARGE VOLT. (@277V): <30V IN 30S

VOLT. DROP: <2% MAX AT FULL RATED UNITY LOAD

OVERLOAD: 140% RATED CURRENT FOR 15 MINUTES

PERFORMANCE: 100dB (14KHZ TO 40GHZ)

MANUFACTURED IN ACCORDANCE WITH  
 THE FOLLOWING STANDARDS:

MIL-STD-220

MIL-F-15733


MIL-STD-810

LV DIRECTIVE



CONFORMS TO  
 UL STD 1283

5025116

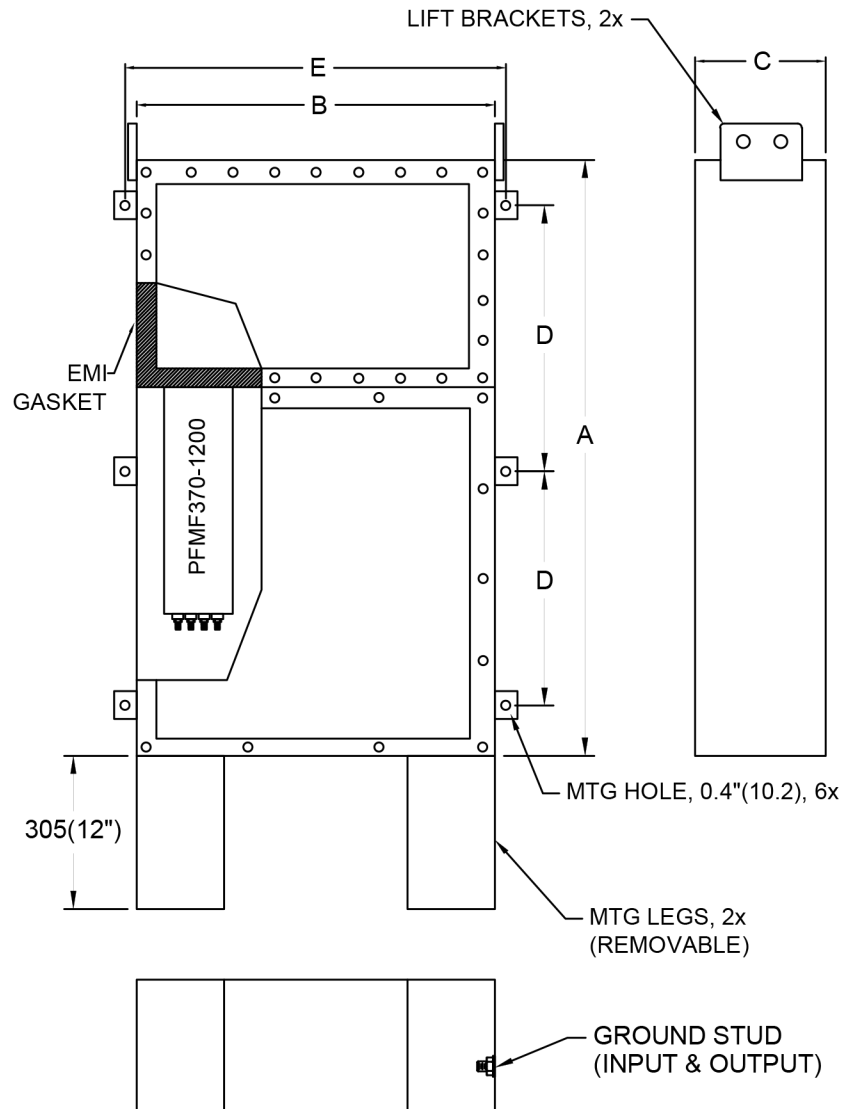

INPUT AND OUTPUT CONDUIT/WIRE PENETRATIONS BY END USER.

MODEL	AMPS	TERMINAL	DIMENSIONS - MM (IN)					WEIGHT LBS(KG)
			A	B	C	D	E	
PFMF370-1200-2	1200	4xM16	2235	711	508	1016	762	1050 (477.3)
			(88)	(28)	(20)	(40)	(30)	